


PLL-ECO 594.0600.30.1/DALI

PL 59 Eco (1xLED 38W 830/3000K 4660lm)

— C0/C180 cd / 1000 lm - - - C90/C270

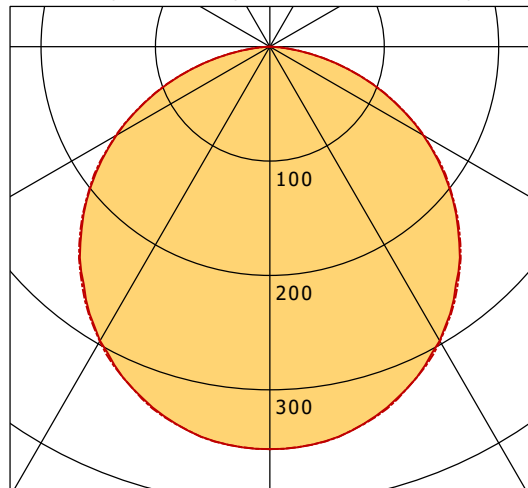

	C0	C90	C180	C270
0°	352	352	352	352
15°	338	338	338	338
30°	297	297	297	297
45°	233	235	233	235
60°	155	156	155	156
75°	65	66	65	66
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	8.96 9.03		182.2
6.0	17.93 18.07		45.5
9.0	26.89 27.10		20.2
12.0	35.85 36.14		11.4
15.0	44.82 45.17		7.3

η	LED
Efficiency	123 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	38 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.5
UGR C90/C270	21.5
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80