


# ML-A 060.1130.11 U19WB/DALI


Monoline 060 | Surface-Mounted | Glare Control (1xLED 33W 830/3000K 2760lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

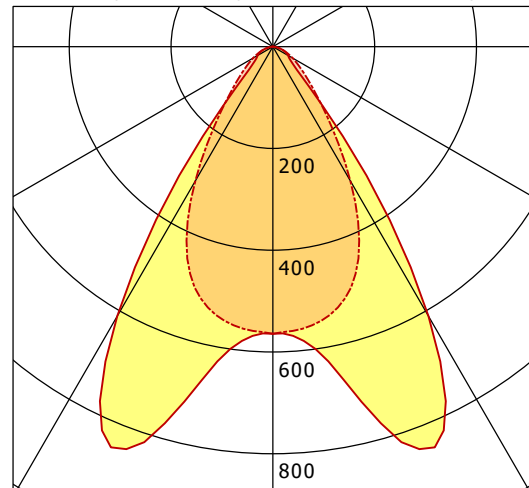

	C0	C90	C180	C270
0°	564	564	564	564
15°	744	522	744	522
30°	611	305	611	305
45°	73	106	73	106
60°	34	45	34	45
75°	16	14	16	14
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

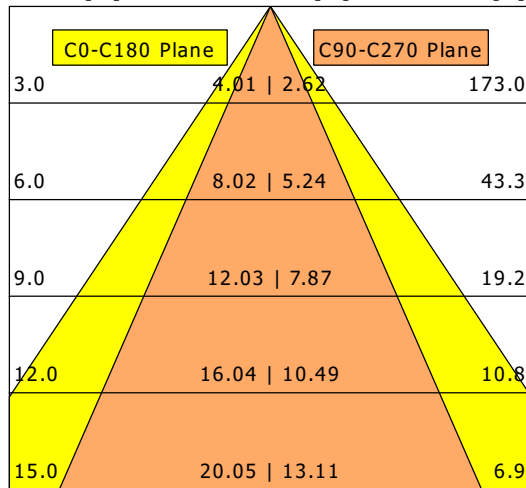

<b>η</b>	LED
Efficiency	84 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	33 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.2
UGR C90/C270	18.4
CIE Flux Codes	81 96 99 100 100
Ra/CRI	>80