


ML-A 070.0730.14 AOV


Monoline 070 Surface-Mounted & Pendant (1xLED 16W 830/3000K 1630lm)

— C0/C180 cd / 1000 lm - - - C90/C270

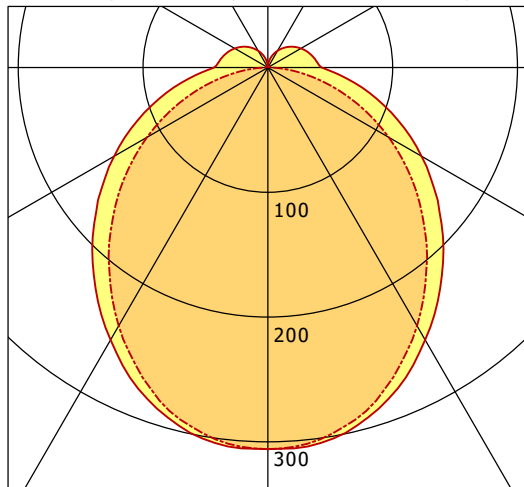

	C0	C90	C180	C270
0°	306	306	306	306
30°	252	239	252	239
60°	142	112	142	112
90°	43	2	43	2
120°	31	1	31	1
150°	16	1	16	1
180°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

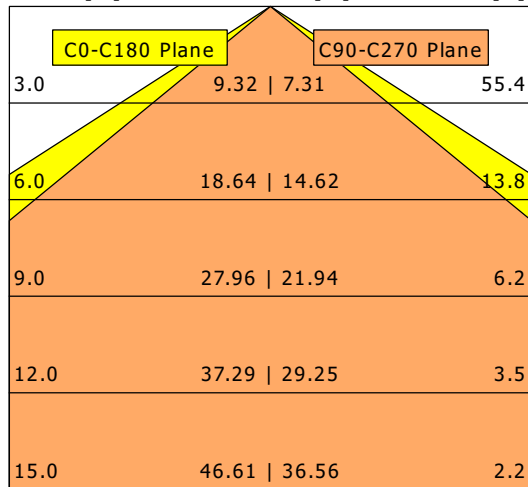

η	LED
Efficiency	102 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.8
UGR C90/C270	19.6
CIE Flux Codes	45 74 92 89 100
Ra/CRI	> 80