


# ML-A 045.0730.14 AOV/DALI


Monoline 045 | Surface-Mounted & Pendant (1xLED 20W 830/3000K 2170lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

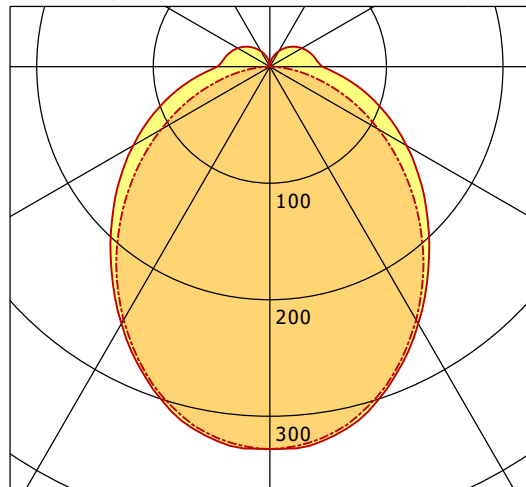

	C0	C90	C180	C270
0°	328	328	328	328
30°	255	251	255	251
60°	135	108	135	108
90°	45	2	45	2
120°	32	1	32	1
150°	15	1	15	1
180°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

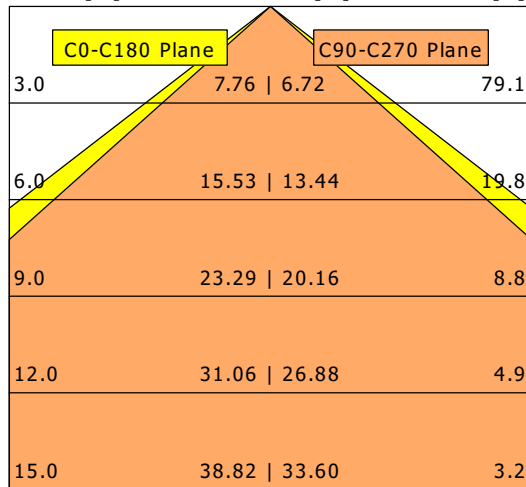

<b>η</b>	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	20 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.8
UGR C90/C270	21.6
CIE Flux Codes	46 75 92 89 100
Ra/CRI	>80