


Connector Location A

Connector Location B







E500416

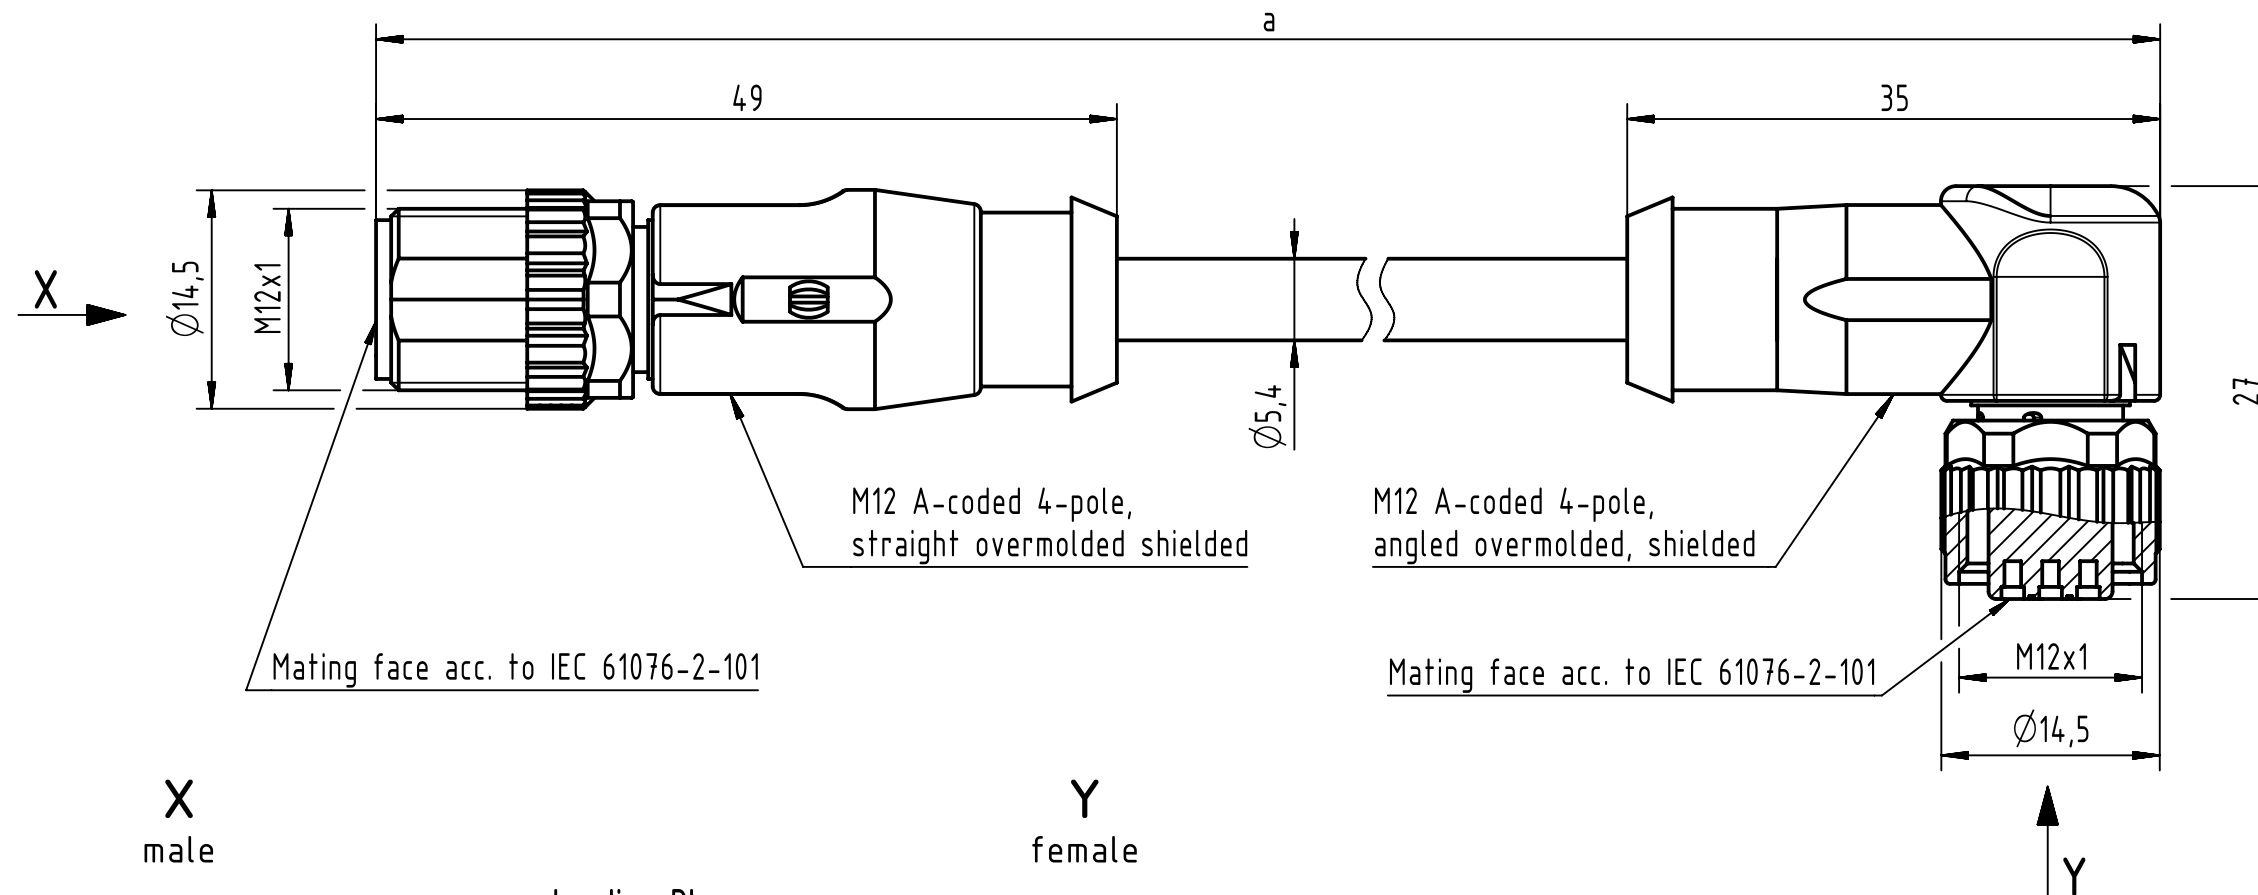

X
male

Y
female

Loading-Plan

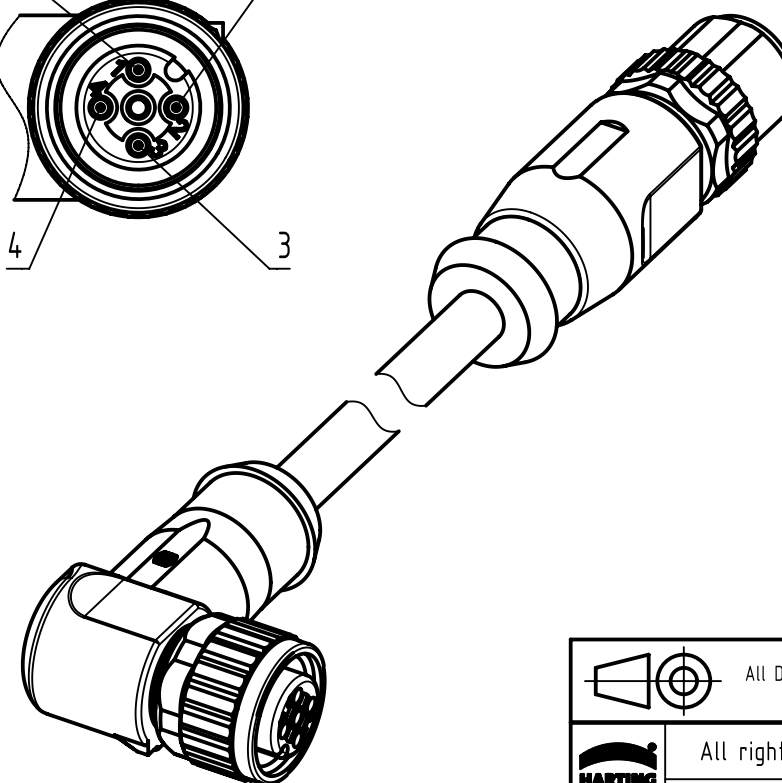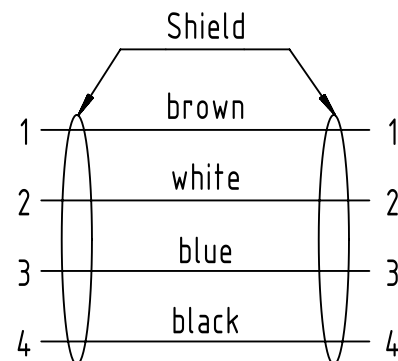

- Protection level: IP67
- Temperature range: -30°C ... +80°C

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

Part no.	213478774XXXXX
-----------------	----------------

Type of cable	XX
PVC grey, 4x0.34mm ²	XX=29
PUR black, 4x0.34mm ²	XX=74

All rights reserved Department HCS - RO HARTING Customised Solutions D-32339 Espelkamp		Tech. Character. Created by STOCHECIC Stoccheci Inspected by COSTEA Costea Standardisation MUNTEANV Muntean Date 2018-12-14 State Final Release		Free size tol. According to production drawing	
Title M12 A-cod 4pole m/f st/an shld		Doc-Key / ECM-Nr. 100758053/UGD/000/B 500000144865		Rev. B	
Type TB		Number 213478774XXXXX		Page 1/1	