


Art. no. 731161

Surface-mounted ceiling and wall lights Sotano, 4,5/7,5
W, 3000/4000 K, Grey

 **DEKOLIGHT**

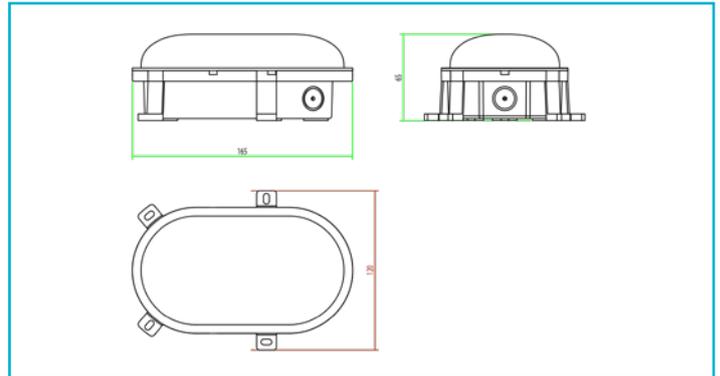

Housing Material	Polycarbonate	Power Consumption	8 kWh/1000h
Housing Color	Grey	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
Material of Lens	Polycarbonate - PC		
Colour of Lens	White		
Surface Structure of Lens	Opal		
Protection Class	Protection class II/protective insulation		
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Number of Cable Entries	6		
Cable Gland Diameter	15 mm		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	3000/4000 K		
Colour Consistency	6 SDCM		
Rated Luminous Flux	450/750 lm		
Rated Luminous Flux 2	750 lm		
Rated Angle of Reflection	120 Degree		
Length	165 mm		
Width	120 mm		
Height	65 mm		
Working Temperature	-30 to 40 °C		
Storage Temperature	-30 to 60 °C		
IP Protection Class	IP 54		
IK Protection Class	IK08		
Life Time L70 / B50	72000 h		
Life Time L80 / B10	72000 h		
Switching Cycles	35000		