


# ML-A 070.0740.11 APB


Monoline 070 Surface-Mounted & Pendant (1xLED 13W 840/4000K 1170lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

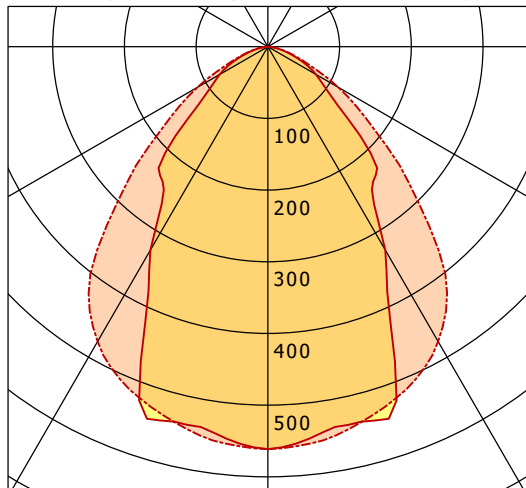

	C0	C90	C180	C270
0°	561	561	561	561
15°	540	537	540	537
30°	327	475	327	475
45°	193	287	193	287
60°	78	114	78	114
75°	24	27	24	27
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

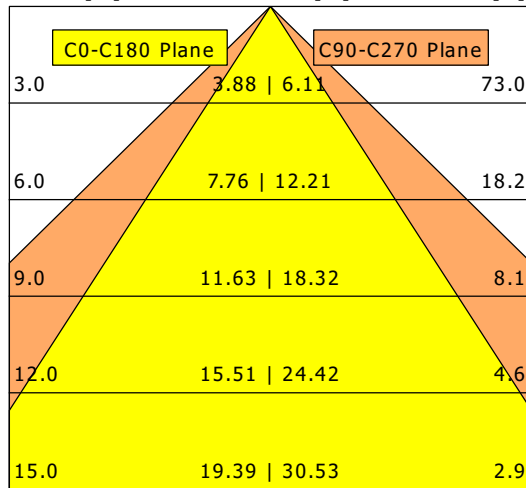

<b>η</b>	LED
Efficiency	90 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.3
UGR C90/C270	18.4
CIE Flux Codes	66 91 99 100 100
Ra/CRI	>80