


# ML-A 060.1130.08 AOV/DALI


Monoline 060 | Surface-Mounted (1xLED 25W 830/3000K 2920lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

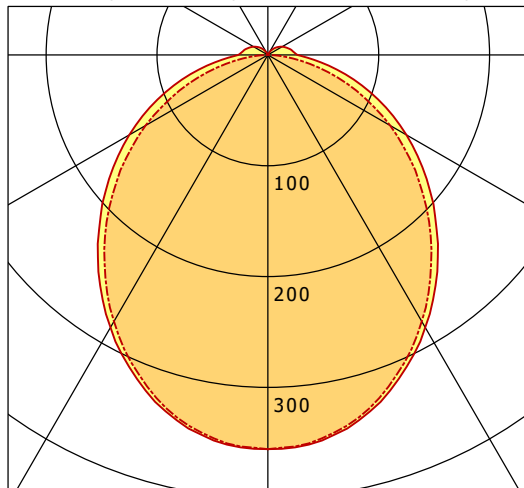

	C0	C90	C180	C270
0°	356	356	356	356
15°	337	335	337	335
30°	284	278	284	278
45°	214	204	214	204
60°	144	127	144	127
75°	76	52	76	52
90°	27	1	27	1
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

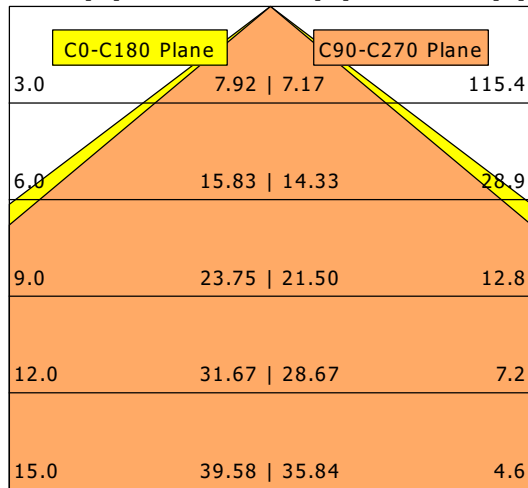

<b>η</b>	LED
Efficiency	117 lm/W
Direct/Indirect	↓ 95% / ↑ 5%
System Power	25 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.4
UGR C90/C270	24.7
CIE Flux Codes	48 78 94 95 100
Ra/CRI	>80