


# ML-A 070.1130.11 APB


Monoline 070 Surface-Mounted & Pendant (1xLED 44W 830/3000K 4010lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

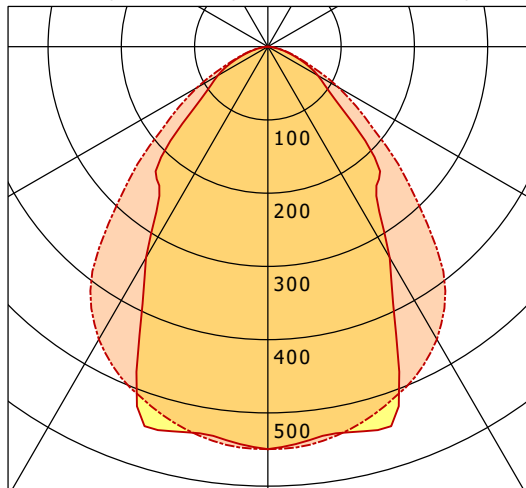

	C0	C90	C180	C270
0°	549	549	549	549
15°	543	526	543	526
30°	333	461	333	461
45°	198	279	198	279
60°	79	112	79	112
75°	24	27	24	27
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

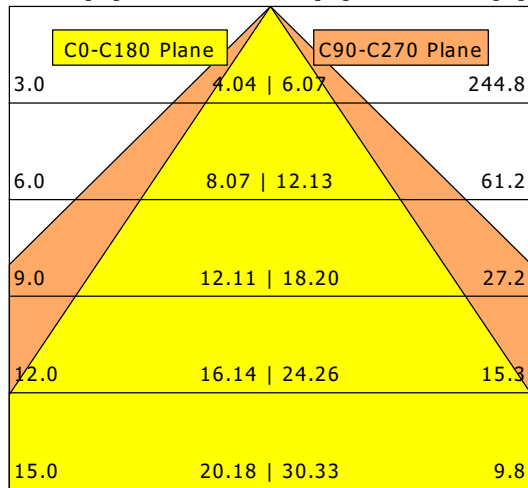

<b>η</b>	LED
Efficiency	91 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	44 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.7
UGR C90/C270	22.7
CIE Flux Codes	66 91 99 100 100
Ra/CRI	>80