


Art. no. 342228

Standing lamp Office Three Standard, Motion, 80 W,
DIM, 4000 K, white

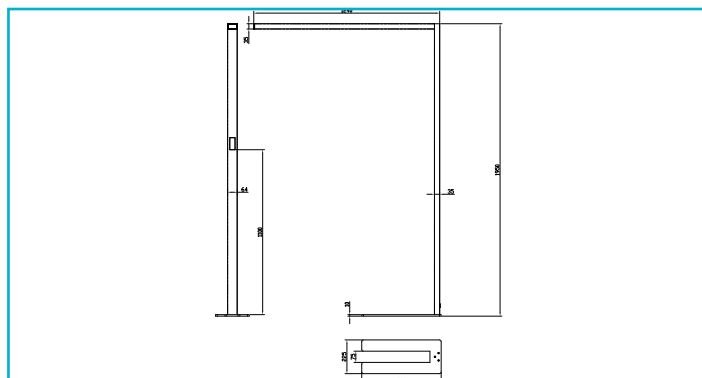

Housing Material	Aluminium	Width	64 mm
Housing Color	White	Height	1950 mm
Material of Lens	Polycarbonate - PC	Base length	530 mm
		Base width	225 mm
Protection Class	Protection class I/protective grounding	Base height	10 mm
Rated Input	80 W	Product weight	11655 g
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Working Temperature	-20 to 45 °C
Power Supply Unit incl.	Yes	Storage Temperature	-40 to 80 °C
Primary Connection	Safety plug	IP Protection Class	IP 20
Primary Cable Length	2.5 m	IK Protection Class	IK06
Connection Type According to Standard	Typ X		
Dimmable	Yes	Life Time L80 / B10	50000 h
Control technology	Touch-Sensor	Switching Cycles	100000
Motion Detector	Yes	Power Consumption	80 kWh/1000h
Kind of Motion Detector	High frequency	Energy Efficiency Class Lightsource	This product contains light sources of energy efficiency classes D and F.
Detection Distance	0-3.5 m		
Angle of Detection	85 Degree		
Light Source	LED, Light source changeable TC		
Lightcolor	Neutral white		
Color Temperature	4000 K		
Colour Consistency	3 SDCM		
Colour Rendering Index (Ra)	95		
Rated Luminous Flux	10100 lm		
Luminous Efficiency	126.3 lm/W		
Rated Angle of Reflection	120 Degree		
Rated Angle of Reflection 2	50 Degree		
UGR	6		
Light Exit Surfaces	2		
Light characteristics	Direct, Indirect		
Light direction	Top, Below		
Length	1240 mm		