


# OPT-R 104.0600.840/DALI


Optico | Recessed (1xLED 42W 840/4000K 4560lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

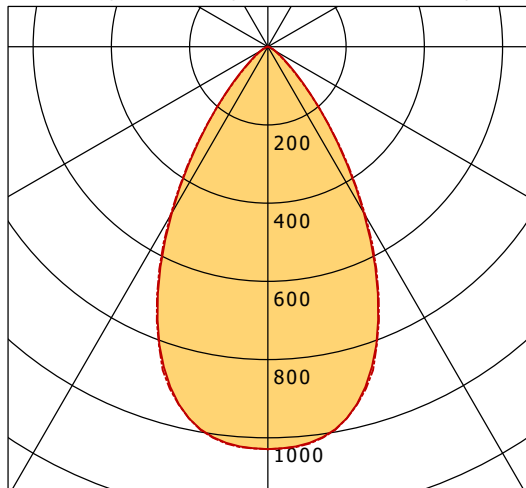

	C0	C90	C180	C270
0°	1029	1029	1029	1029
15°	924	927	924	927
30°	491	498	491	498
45°	115	109	115	109
60°	22	21	22	21
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

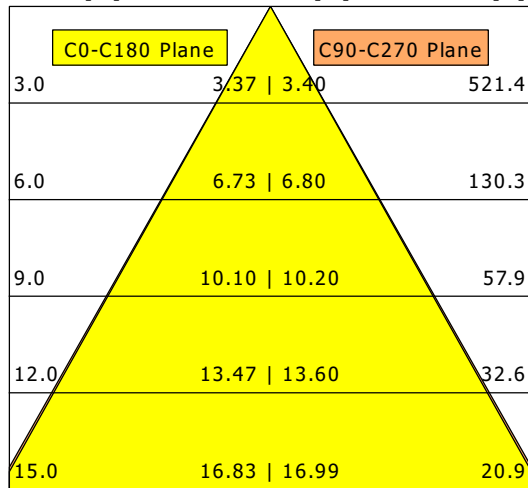

<b>η</b>	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	42 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	12.6
UGR C90/C270	12.4
CIE Flux Codes	88 99 100 100 100
Ra/CRI	> 80