


CSARL 71.20.50/B


CSA 71 Round (1xLED 42W BAKERY 3970lm 50 °)

— C0/C180 cd / 1000 lm

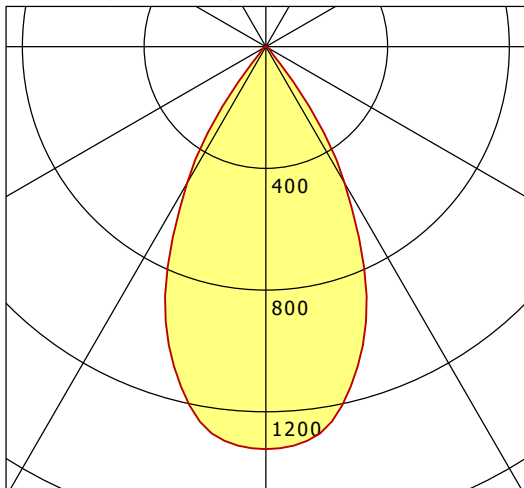

	C0	C90	C180	C270
0°	1323	1323	1323	1323
15°	1123	1123	1123	1123
30°	517	517	517	517
45°	26	26	26	26
60°	10	10	10	10
75°	4	4	4	4
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

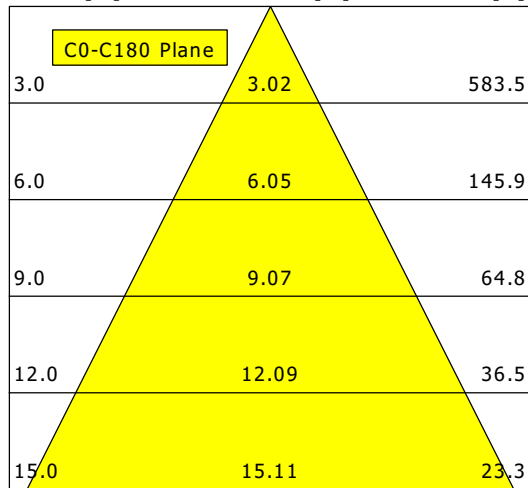

η	LED
Efficiency	95 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	42 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.7
UGR C90/C270	21.7
CIE Flux Codes	96 99 100 100 100
Ra/CRI	---