Alle Rechte vorbehalten/ *All rights reserved*

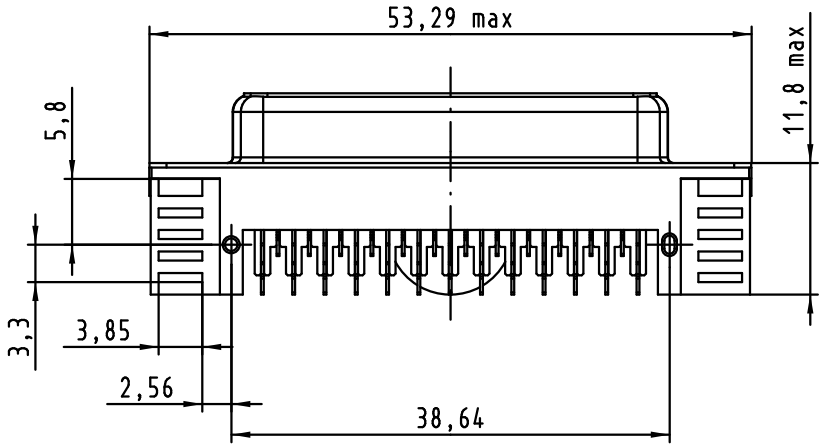

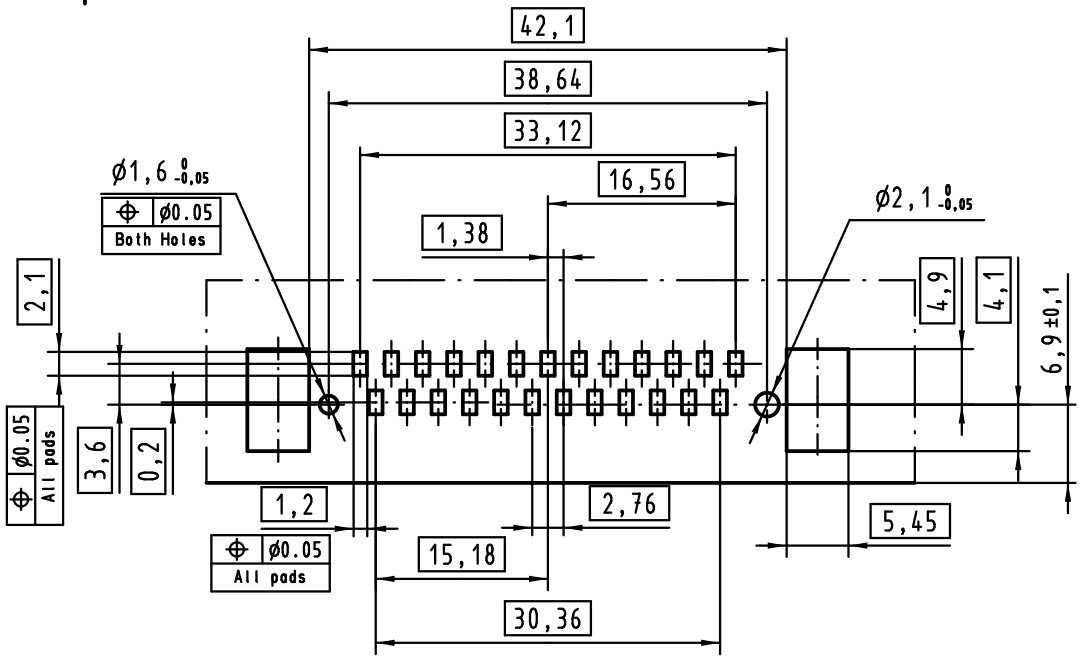

PCB Layout, component side (thickness 1,6mm min.)

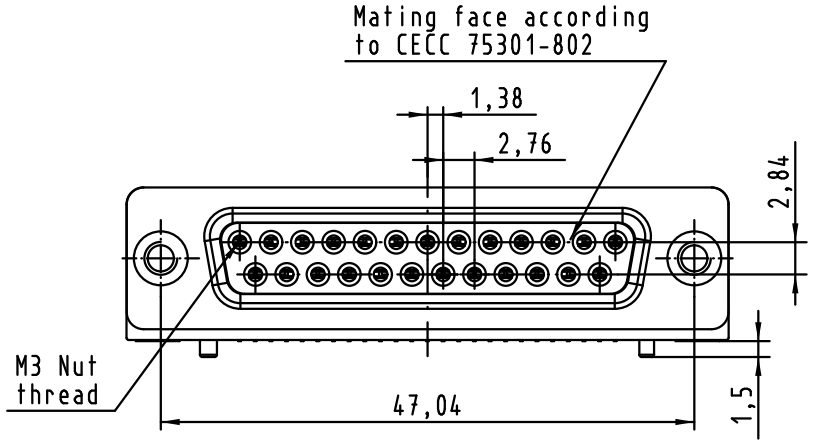

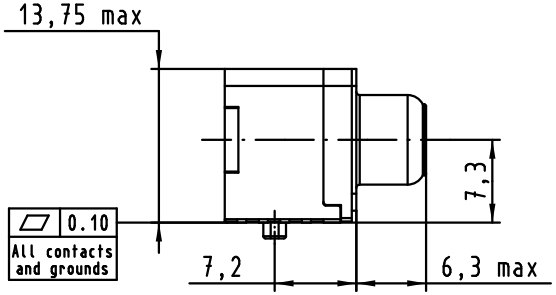



Max. Temperature: 260°C during 10 seconds

Part number	PL	Thread	Index designation	Mod.	Dat.	Name
09553563612.741	1	4-40 UNC	Black Insulator			
09553566612.741	2					
09553567612.741	3					
09553563611.741	1	M3				
09553566611.741	2			ECO2316	30Aug2010	ED
09553567611.741	3			ECO1953	30Jun2010	ED

Reel Packaging (140 connectors) see page 2/2

	Dat.	Name
Detail.	30Jun2010	ED
Insp.		
Stand.		

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-SUB SMT
Standard Female 25p
with die casted grounds
and nuts

TB 09 55 356 x61x

Sub.

Maßstab/ *Scale* 1,5:1

Blatt/ *Page* 1/2

Released / Freigegeben 2010/09/09-05:59:36 UTC