


Printed board layout (1,6±0,2 thick)
view component side
(PCB plating = Tin)

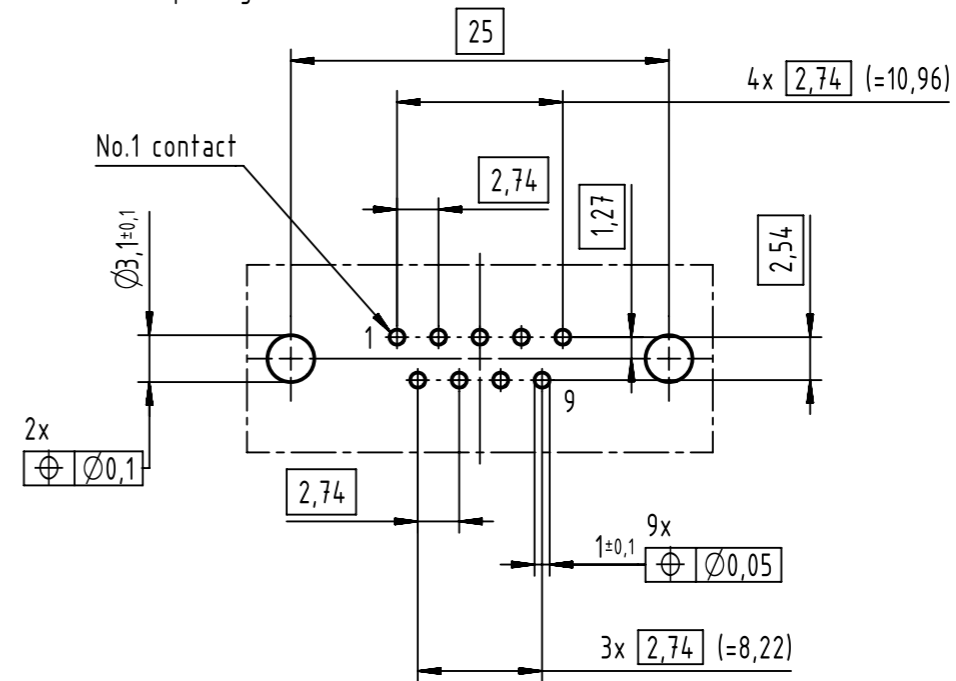

Mounting force on Printed board: 25-80 N

| Part number | Performance level | nut thread |
|---------------|-------------------|------------|
| 0966 162 7813 | AU3 | 4-40 UNC |
| 0966 162 6813 | AU2 | 4-40 UNC |
| 0966 162 5813 | 0,76µm AU | 4-40 UNC |

| | | | | |
|---|--|-----------------------|----------------------|---|
| | All Dimensions in mm Original Size DIN A3 | Scale 2:1 | Free size tol. | Ref. |
| | All rights reserved Department EC PD - CN | Created by ZHUANGJ | Inspected by LUOK | Standardisation HOFFMANN |
| HARTING Electronics GmbH D-32339 Espelkamp | Title D-Sub standard 9-pole male 2,54mm pitch with screw lock | | | Date 2015-10-27 |
| | Type TB | | | State Final Release |
| Number 0966162X813 | | | | Doc-Key / ECM-Nr. 100644188/UGD/000/A 50000095926 |
| | | | | Rev. A |
| | | | | Page 1/1 |