



# ORYO-P 101.927.25

Oryo 100 | Pendant (1xLED 20W 927/2700K 1650lm 25°)

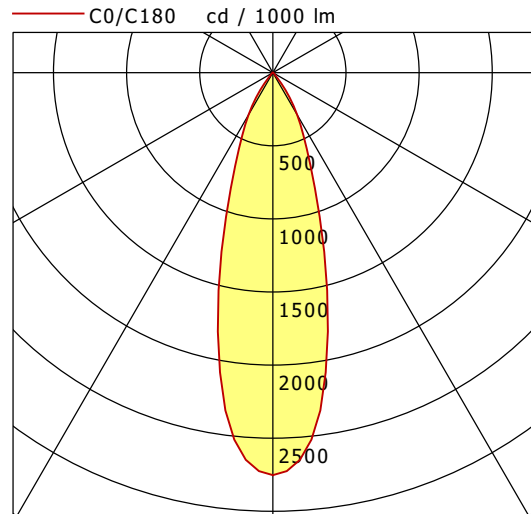

|              | C0   | C90  | C180 | C270 |
|--------------|------|------|------|------|
| 0°           | 2753 | 2753 | 2753 | 2753 |
| 15°          | 1403 | 1403 | 1403 | 1403 |
| 30°          | 332  | 332  | 332  | 332  |
| 45°          | 17   | 17   | 17   | 17   |
| 60°          | 7    | 7    | 7    | 7    |
| 75°          | 2    | 2    | 2    | 2    |
| 90°          | 0    | 0    | 0    | 0    |
| cd / 1000 lm |      |      |      |      |

Offset [m] Cone width [m] Illuminance [lx]

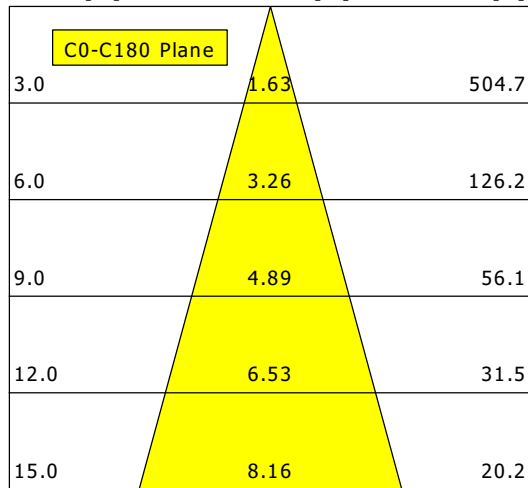

|                    |                   |
|--------------------|-------------------|
| <b>η</b>           | LED               |
| Efficiency         | 83 lm/W           |
| Direct/Indirect    | ↓ 100% / ↑ 0%     |
| System Power       | 20 W              |
| <b>UGR</b>         | X=4H, Y=8H        |
| Reflection factors | 70/50/20          |
| UGR C0/C180        | 19.1              |
| UGR C90/C270       | 19.1              |
| CIE Flux Codes     | 97 99 100 100 100 |
| Ra/CRI             | >90               |