

## Panel mounting socket outlet, straight - flange 75x75, fixing centers 60x60




Product description	
BALS-Prd.-Nr	130158
EAN	4024941190510
product category (PG)	Panel mounting socket outlet Quick-Connect twin terminal, straight
current (A)	16A
number of poles (P99)	5p
number of poles (P)	3p+N+PE
position of earth contact (H)	6 h
voltage (V)	200/346 up to 240/415V

Product description	
frequency (HZ)	50 and 60Hz
protection degree (SA)	IP67
colour code 1 (KF1)	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Bayonet ring grey RAL 7035, Enclosure grey RAL 7035
connection design (AT)	screwless spring terminals as cage clamp with Kontex-contact
maximum conductor size (LQ)	4,0 qmm
cable entry (KE)	other
Height	92mm
Width	86mm
Depth	77mm
Flange size vertical	75mm
Flange size horizontal	75mm
Drill hole distance vertical	60mm
Drill hole distance horizontal	60mm
material of enclosure (GM)	Polyamide
contact	The contact carrier is made of polyamide, The contacts are brass

Logistics data	
Weight/pcs	0.205 kg / Piece
Packaging	Bag

Logistics data	
Content amount	1 ST
EAN	4024941190510
Length	77 mm
Width	86 mm
Height	92 mm
Weight	0.206 kg
Volume	609.224 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941830348
Length	245 mm
Width	177 mm
Height	185 mm
Weight	2.183 kg
Volume	7,140 ccm

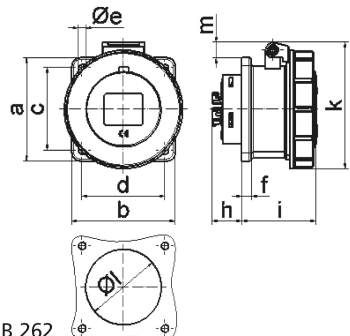

4 MB 262

Ampere	16
Polzahl	5
a	75,0
b	75,0
c	60,0
d	60,0
e ø	5,5
f	7,0
h	23,0
i	57,0
k	93,0
l ø	55,0
m	11,5
Leiter mm <sup>2</sup> min	1,5
Leiter mm <sup>2</sup> max	4