


PLL 25.675.30.1/DALI


PL 25 (1xLED 75W 830/3000K 7630lm)

— C0/C180 cd / 1000 lm - - - C90/C270

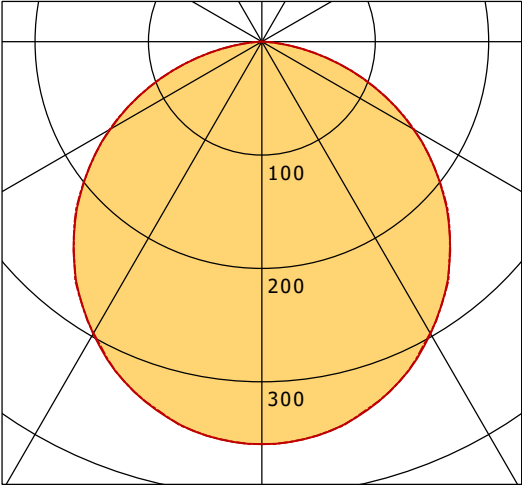

	C0	C90	C180	C270
0°	355	355	355	355
15°	340	339	340	339
30°	298	297	298	297
45°	234	234	234	234
60°	154	155	154	155
75°	65	65	65	65
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

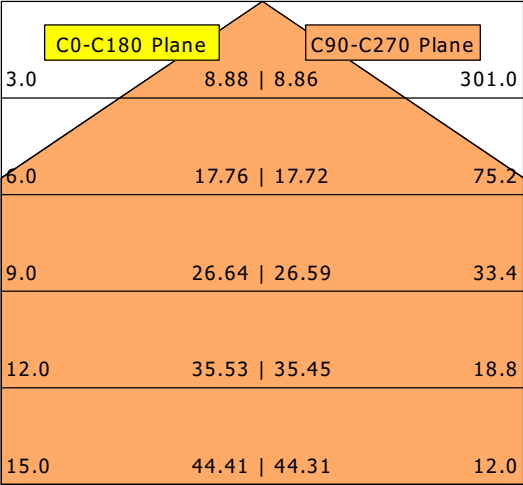

η		LED
Efficiency		102 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		75 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		23.1
UGR C90/C270		23.1
CIE Flux Codes		47 79 96 100 100
Ra/CRI		> 80