


LUZ-D12 101.830.60/DALI


LUZ | Pendant (1xLED 12W 830/3000K 1630lm)

— C0/C180 cd / 1000 lm - - - C90/C270

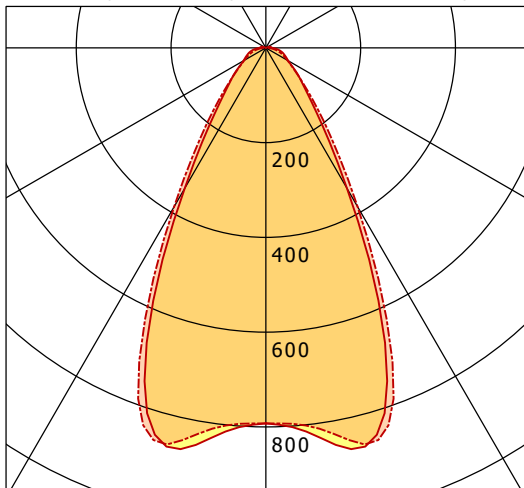

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 793 | 793 | 793 | 793 |
| 15° | 861 | 864 | 861 | 864 |
| 30° | 342 | 387 | 342 | 387 |
| 45° | 112 | 120 | 112 | 120 |
| 60° | 55 | 53 | 55 | 53 |
| 75° | 36 | 27 | 36 | 27 |
| 90° | 14 | 2 | 14 | 2 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

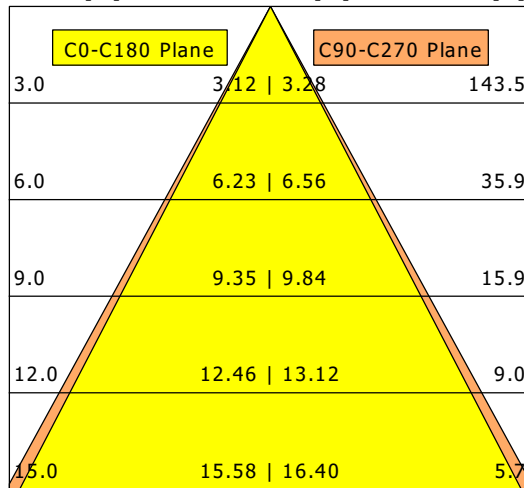

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 136 lm/W |
| Direct/Indirect | ↓ 98% / ↑ 2% |
| System Power | 12 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 20.4 |
| UGR C90/C270 | 19.9 |
| CIE Flux Codes | 76 90 96 98 100 |
| Ra/CRI | > 80 |