


LED surface mounted damp proof luminaire
Artikel-Nr. 78014114

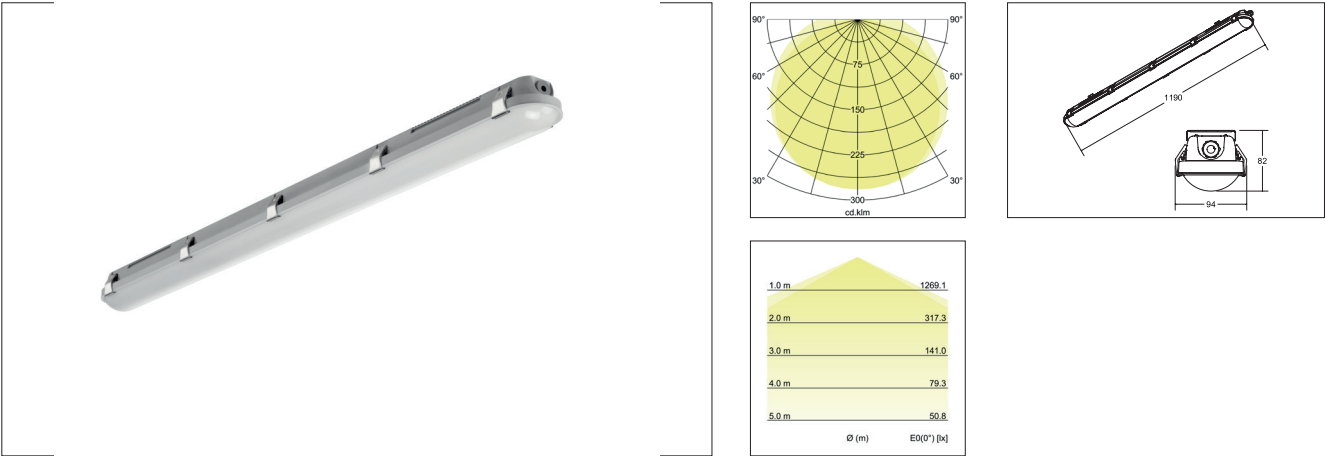

LED surface mounted damp proof luminaire, rectangular. Surface mounting Mounting method: Surface mounting, Place of installation: Material: Polycarbonate / Stainless steel, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 35W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 4.500lm, Colour temperature: 4.000 K, Beam angle: 117°, Adjustability: Not adjustable, With control gear: Yes, Control: on/off.

Artikel-Nr.	78014114
Stand:	07.12.2021 10:51

Colour temperature	4000 K
Luminous flux	4,500 lm
System output	35 W
weight	1.660 kg
Length	1,190 mm
Width	94 mm
Aufbauhöhe	82 mm
Amount of light sources / fittings	1 Qty
Control	on/off
Colour rendering	CRI > 80
Suitable for through-wiring	Ja, mit optionalen Zubehör
Material	Polycarbonate / Stainless steel

Voltage	230V AC 50Hz
Rated life time L80/B50 at 25 °C	50000 h
Lamp	LED
scope of delivery	Incl. converter for connection to the 230-V mains voltage
Circuit type	Parallel conduction
Impact resistance	IK08
Degree of protection	IP65
Protection class	I
Adjustability	Not adjustable
Ambient temperature	-20 °C bis +40 °C
Glühdrahtprüfung nach IEC 60695-2-12850°C - 5s	