



# VTRM 13.0530.35/DALI

Vale-Tu Round Medium (1xLED 12W 830/3000K 1120lm Wide-Flood °)

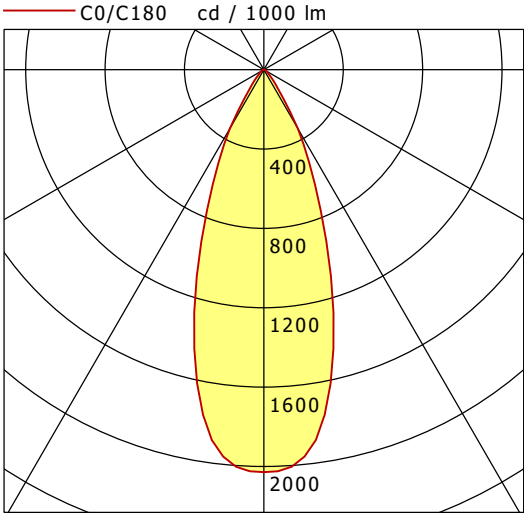

|              | C0   | C90  | C180 | C270 |
|--------------|------|------|------|------|
| 0°           | 2029 | 2029 | 2029 | 2029 |
| 15°          | 1362 | 1362 | 1362 | 1362 |
| 30°          | 343  | 343  | 343  | 343  |
| 45°          | 43   | 43   | 43   | 43   |
| 60°          | 14   | 14   | 14   | 14   |
| 75°          | 7    | 7    | 7    | 7    |
| 90°          | 0    | 0    | 0    | 0    |
| cd / 1000 lm |      |      |      |      |

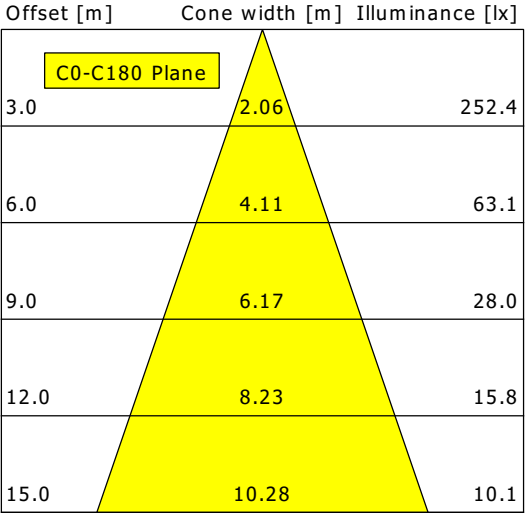

|                    |                   |               |
|--------------------|-------------------|---------------|
| <b>η</b>           |                   | LED           |
| Efficiency         |                   | 93 lm/W       |
| Direct/Indirect    |                   | ↓ 100% / ↑ 0% |
| System Power       |                   | 12 W          |
| <b>UGR</b>         |                   | X=4H, Y=8H    |
| Reflection factors |                   | 70/50/20      |
| UGR C0/C180        |                   | 22.1          |
| UGR C90/C270       |                   | 22.1          |
| CIE Flux Codes     | 93 98 100 100 100 |               |
| Ra/CRI             |                   | > 80          |