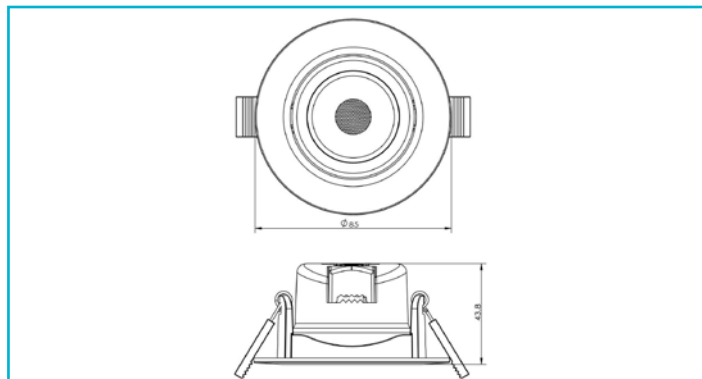


**Special features**

- 230 V direct connection
- Dimmable
- Low installation depth

Housing Material	Plastic
Housing Color	Black
Material of Lens	Plastic
Protection Class	Protection class II/protective insulation
Rated Input	6.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	Yes
Control technology	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Working Temperature	-5 to 40 °C
Storage Temperature	-10 to 40 °C
IP Protection Class	IP 20

Life Time L70 / B50	30000 h
Switching Cycles	50000
Power Consumption	7 kWh/1000h
Energy Efficiency Class	G

Light Source	LED, Light source not changeable
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	550 lm
Luminous Efficiency	84.6 lm/W
Rated Angle of Reflection	45 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Swivel Angle	36 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	44 mm
Diameter	85 mm
Installation Depth	41.3 mm
Cut Out Diameter	68 mm
Product weight	78 g

