


# BIXXL 204.30.25.2

Bixxl 200 (1xLED 41W 830/3000K 4260lm 25 °)

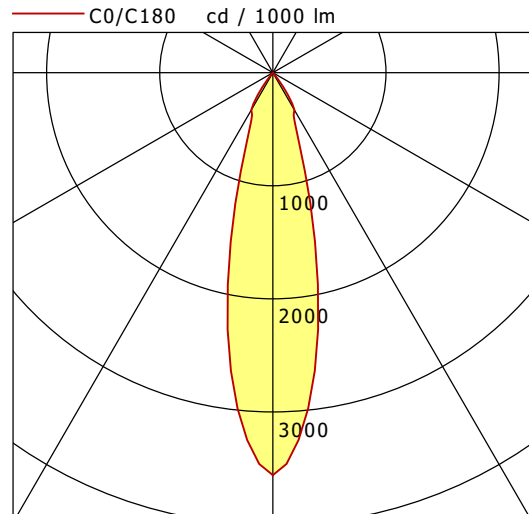

	C0	C90	C180	C270
0°	3559	3559	3559	3559
15°	1367	1367	1367	1367
30°	381	381	381	381
45°	6	6	6	6
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
<b>C0-C180 Plane</b>		
3.0	1.36	1684.5
6.0	2.71	421.1
9.0	4.07	187.2
12.0	5.42	105.3
15.0	6.78	67.4

<b>η</b>	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	41 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.0
UGR C90/C270	18.0
CIE Flux Codes	99 99 100 100 100
Ra/CRI	>80