

lightnet

Basic-G1

Pendant luminaire - Direct light distribution

Article code: BG1OSL-840M-D600-P



Illustrations may only be similar and serve as an orientation.

Basic-G1. LED. Pendant luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxH (round). D=600mm. H=75mm. Rod suspension with ceiling rose (Set). Pendant length on request. Ceiling rose: Matching



luminaire`s surface colour. Medium-power current. 7470lm. 50W. 9,3kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

lightnet

Basic-G1

Pendant luminaire - Direct light distribution

Article code: BG1OSL-840M-D600-P

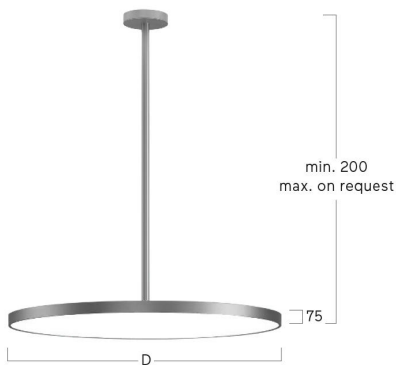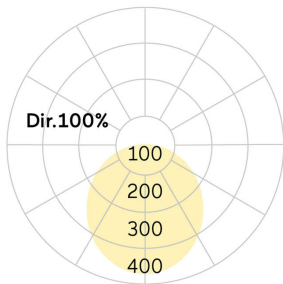

Customer / Project: _____

Note: _____

| | |
|------------------------------|---|
| Productname | Basic-G1 |
| Lamp | LED |
| Installation Type | Pendant luminaire |
| Surface finish | Radiant Silver |
| Light characteristics | Direct light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Opal diffuser |
| Control | Dimmable (DALI) |
| Length L/Diameter D (mm) | D=600mm |
| Height H (mm) | H=75mm |
| Current/Power | Medium-Power |
| Luminous Flux | 7470lm |
| Power consumption | 50W |
| Suspension | Rod susp. (Set) |
| Ceiling rose colour | Ceiling rose: Matching luminaire`s surface colour |
| Pendant length (mm) | Pendant length on request |
| Degree of protection | IP40 |
| Certification | Prüfzeichen: ENEC |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| Photometric code | 8 40 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 9,3kg |

