


MILA-P 308.1500.840/ORGR

Mila | Pendant (1xLED 56W 840/4000K 8570lm)

— C0/C180 cd / 1000 lm - - - C90/C270

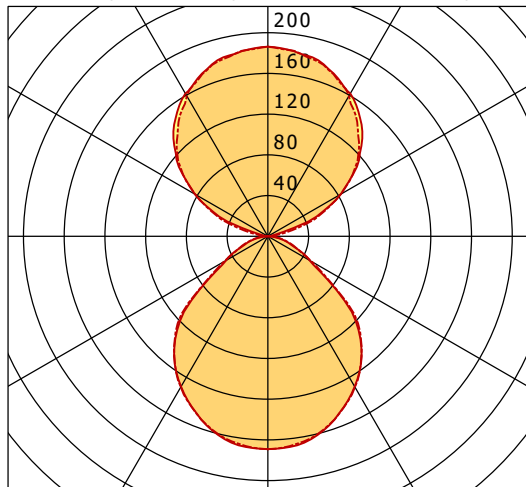

	C0	C90	C180	C270
0°	209	209	209	209
30°	171	171	171	171
60°	47	50	47	50
90°	0	0	0	0
120°	83	82	83	82
150°	162	159	162	159
180°	186	186	186	186
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	153 lm/W
Direct/Indirect	↓ 48% / ↑ 52%
System Power	56 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.2
UGR C90/C270	16.6
CIE Flux Codes	57 87 97 48 100
Ra/CRI	>80