
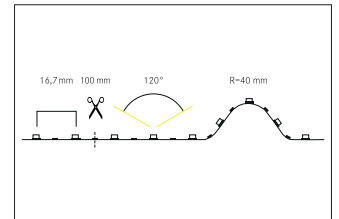


QualityFlex Performance flex lighting 5 m, CRI > 95, 15 W / m, IP00

**Artikel-Nr. 19304003**

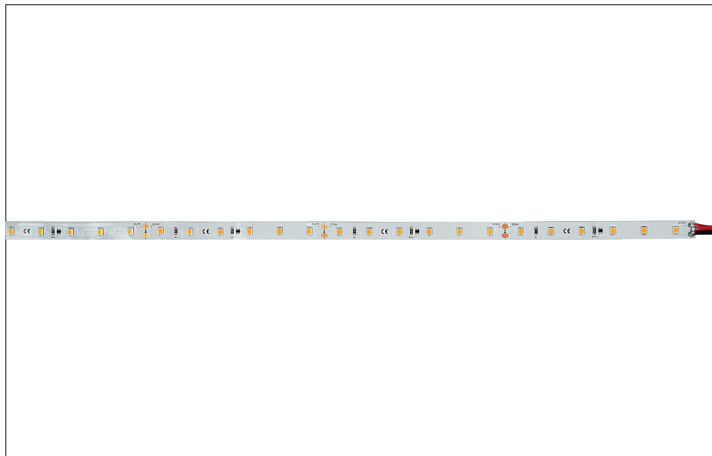

QualityFlex Performance flex lighting 5 m, CRI > 95, 15 W / m, IP00, white, 3.000K, CRI > 95. LED flex lighting Länge: 5000.0 mm Lampenleistung je Meter: 15.0 W/m, Lichtstrom je Meter: 1230.0 lm/m, Schutzart raumseitig: IP00, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 60 LEDs pro Meter, Chip-Abstand (Short Pitch) : 16,7mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 100 mm eingekürzt werden. Die maximale Systemlänge von 10.000mm darf mit einer Einspeisung nicht überschritten werden.

**Artikel-Nr.** 19304003  
**Stand:** 06.12.2021 17:30

Colour temperature	3000 K
Light colour	White
Luminous flux per meter	1,230 lm/m
Power	75 W
Lamp power per meter	15 W/m
Beam angle	120 °
Length	5,000 mm
Width	10 mm
Aufbauhöhe	1.4 mm
Length of individual sections	100 mm
Degree of protection	IP00
Protection class	III

McAdam-Step	McAdam-Step 5
Short Pitch	16.7 mm
Number of lamps per meter	60 Qty
Voltage	24V
Voltage type	DC
Ambient temperature	-10 °C bis +40 °C
Control	Dimming depending on driver
Circuit type	Parallel conduction
Length of the connection line	350 mm
Colour rendering	CRI > 95
Maximum module length	10,000 mm