



QualityFlex BB-flex lighting RGBW 5 m, 14,4 W / m, IP00
Artikel-Nr. 38204002

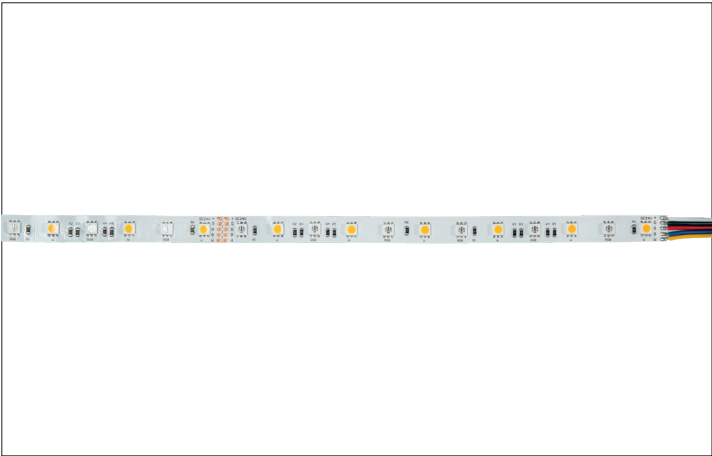

QualityFlex BB-flex lighting RGBW 5 m, 14,4 W / m, IP00, rgbw, CRI > 90. LED flex lighting Länge: 5000.0 mm Lampenleistung je Meter: 14.4 W/m, Schutzart raumseitig: IP00, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 120 LEDs pro Meter, Chip-Abstand (Short Pitch) : 16,7mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 200 mm eingekürzt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden. This luminaire contains incorporated and non-exchangeable LED light sources

Artikel-Nr.

38204002

Stand:

06.12.2021 18:59

Colour temperature	RGBW
Light colour	RGBW
Power	72 W
Lamp power per meter	14.4 W/m
Beam angle	120 °
Length	5,000 mm
Width	12 mm
Aufbauhöhe	2.1 mm
Length of individual sections	200 mm
Degree of protection	IP00
Protection class	III

McAdam-Step	McAdam-Step 5
Short Pitch	16.7 mm
Number of lamps per meter	60 Qty
Voltage	24V
Voltage type	DC
Ambient temperature	-10 °C bis +40 °C
Control	Dimming depending on driver
Circuit type	Parallel conduction
Length of the connection line	350 mm
Maximum module length	5,000 mm