

Wall mounting socket outlet - straight, housing dimensions 102x102 mm




| Product description | |
|-------------------------------|--|
| BALS-Prd.-Nr | 110563 |
| EAN | 4024941938600 |
| product category (PG) | TE wall mounting socket outlet Quick-Connect |
| current (A) | 16A |
| number of poles (P99) | 4p |
| number of poles (P) | 3P+PE |
| position of earth contact (H) | 4 h |
| voltage (V) | 100 up to 130V |

| Product description | |
|-----------------------------|--|
| frequency (HZ) | 50 and 60Hz |
| protection degree (SA) | IP67 |
| colour code 1 (KF1) | yellow RAL 1012 |
| Colour of appliance | Hinged lid yellow RAL 1012, Enclosure grey RAL 7035 |
| connection design (AT) | screwless spring terminals as cage clamp with Kontex-contact |
| maximum conductor size (LQ) | 4,0 qmm |
| cable entry (KE) | 3 sides 2x M20/25, 1 side 1x M20/25, to break out |
| Height | 102mm |
| Width | 102mm |
| Depth | 126mm |
| dimension of enclosure (GG) | 102x102 mm (HxW) |
| material of enclosure (GM) | Polyamide |
| contact | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties | |
|---------------------------------|------------------------------------|
| | All cable entries are to break out |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.355 kg / Piece |
| Packaging | Bag |

| Logistics data | |
|----------------|---------------|
| Content amount | 1 ST |
| EAN | 4024941938600 |
| Length | 126 mm |
| Width | 102 mm |
| Height | 102 mm |
| Weight | 0.356 kg |
| Volume | 1,310.904 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941828413 |
| Length | 325 mm |
| Width | 217 mm |
| Height | 210 mm |
| Weight | 3.756 kg |
| Volume | 13,588.4 ccm |

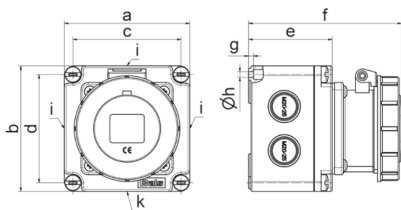

1 MB 121

| Ampere Polzahl | 16 3 | 16 4 | 16 5 | 32 3 | 32 4 | 32 5 |
|----------------------------|----------|----------|----------|----------|----------|----------|
| a | 102,0 | 102,0 | 102,0 | 102,0 | 102,0 | 102,0 |
| b | 102,0 | 102,0 | 102,0 | 102,0 | 102,0 | 102,0 |
| c | 88,0 | 88,0 | 88,0 | 88,0 | 88,0 | 88,0 |
| d | 88,0 | 88,0 | 88,0 | 88,0 | 88,0 | 88,0 |
| e | 68,0 | 68,0 | 68,0 | 68,0 | 68,0 | 68,0 |
| f | 124,0 | 125,0 | 124,0 | 134,0 | 134,0 | 134,0 |
| g | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 |
| h ø | 4,5 | 4,5 | 4,5 | 4,5 | 4,5 | 4,5 |
| i | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 |
| k | M20/25 | M20/25 | M20/25 | M20/25 | M20/25 | M20/25 |
| Leiter mm ² min | 1,5 | 1,5 | 1,5 | 2,5 | 2,5 | 2,5 |
| Leiter mm ² max | 4 | 4 | 4 | 10 | 10 | 10 |