

Panel mounting appliance inlet, angled - 7 poles, flange 85x85




| Product description | |
|---------------------------|---|
| BALS-Prd.-Nr | 27118 |
| EAN | 4024941271189 |
| Product category | TE panel mounting appliance inlet, angled |
| Current | 16A |
| Number of poles | 7p |
| Arrangement of phases | 6p+PE |
| Position of earth contact | 6 h |
| Voltage | 400V~ |

| Product description | |
|--------------------------------|--|
| Frequency | 50/60Hz |
| Protection degree | IP67 |
| Colour code | red RAL 3000 |
| Colour of appliance | Collar red RAL 3000, Bayonet ring grey RAL 7035, Enclosure grey RAL 7035 |
| Connection design | with screw terminal |
| Maximum conductor size | 2,5 qmm |
| Cable entry | other |
| Height | 99mm |
| Width | 86.5mm |
| Depth | 115mm |
| Flange size vertical in mm | 85mm |
| Flange size horizontal in mm | 85mm |
| Drill hole dist. vertical mm | 70mm |
| Drill hole dist. horizontal mm | 70mm |
| Material of enclosure | Polyamide |
| Contacts | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties | |
|---------------------------------|------------------------|
| | The inclination is 10° |

| Logistics data | |
|----------------|-----------------|
| Weight/pcs | 0.25 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |
| EAN | 4024941271189 |
| Length | 115 mm |
| Width | 86.5 mm |
| Height | 99 mm |
| Weight | 0.251 kg |
| Volume | 984.803 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941836050 |
| Length | 295 mm |
| Width | 185 mm |
| Height | 215 mm |
| Weight | 2.664 kg |
| Volume | 9,975 ccm |

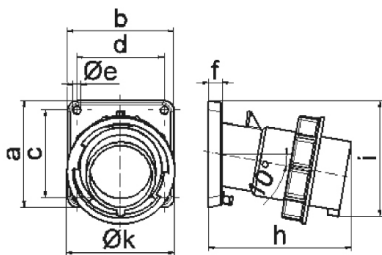

| Ampere | 16 | 32 | | | | | |
|----------------------------|-------|-------|--|--|--|--|--|
| Polzahl | 7 | 7 | | | | | |
| a | 85,0 | 85,0 | | | | | |
| b | 85,0 | 85,0 | | | | | |
| c | 70,0 | 70,0 | | | | | |
| d | 70,0 | 70,0 | | | | | |
| e ø | 6,3 | 6,3 | | | | | |
| f | 11,0 | 11,0 | | | | | |
| h | 116,0 | 127,0 | | | | | |
| i | 92,0 | 100,0 | | | | | |
| k | 86,5 | 101,5 | | | | | |
| Leiter mm ² min | 1 | 2,5 | | | | | |
| Leiter mm ² max | 2,5 | 6 | | | | | |

5 MB 183