


CHOCM-R 220.840.80.02/DALI


Choc | Recessed (1xLED 7W 840/4000K 800lm 80 °)

— C0/C180 cd / 1000 lm - - - C90/C270

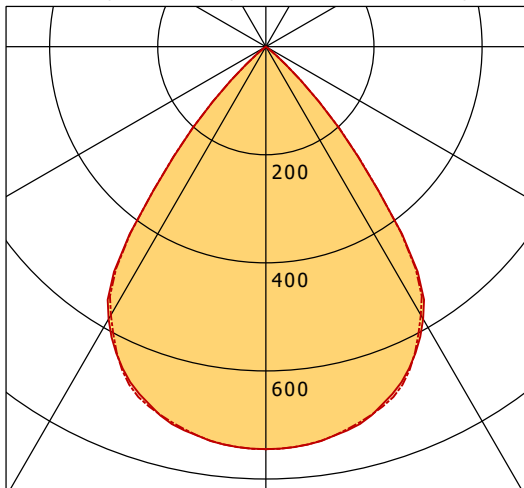

	C0	C90	C180	C270
0°	745	745	745	745
15°	715	713	715	713
30°	582	573	582	573
45°	114	115	114	115
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

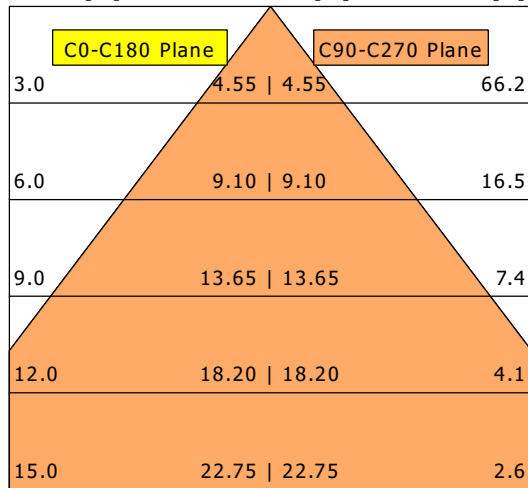

η	LED
Efficiency	114 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	7 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	18.9
CIE Flux Codes	89 100 100 100 100
Ra/CRI	>80