


ML-A 060.1040.14 AOV/DALI


Monoline 060 | Surface-Mounted (1xLED 25W 840/4000K 3070lm)

— C0/C180 cd / 1000 lm - - - C90/C270

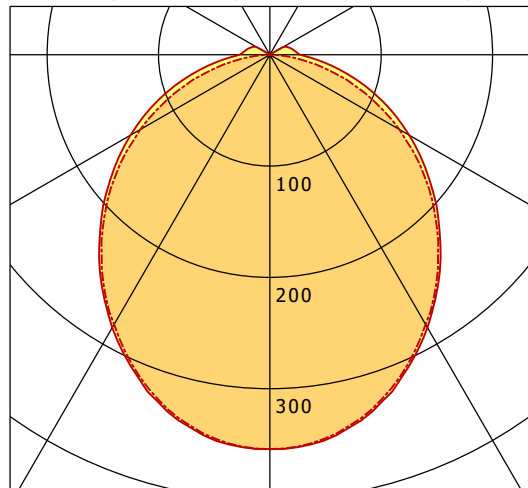

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 354 | 354 | 354 | 354 |
| 15° | 336 | 334 | 336 | 334 |
| 30° | 283 | 280 | 283 | 280 |
| 45° | 215 | 211 | 215 | 211 |
| 60° | 145 | 134 | 145 | 134 |
| 75° | 76 | 56 | 76 | 56 |
| 90° | 27 | 2 | 27 | 2 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

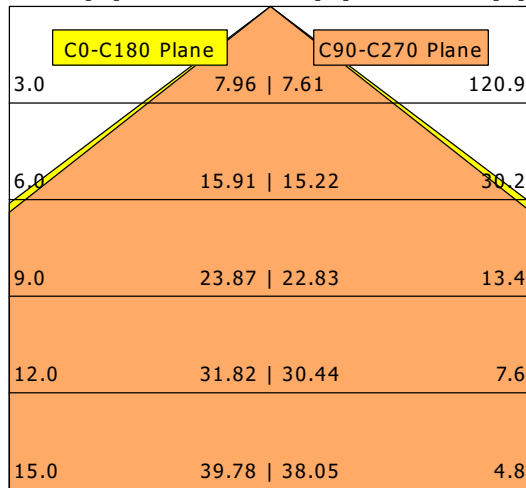

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 123 lm/W |
| Direct/Indirect | ↓ 96% / ↑ 4% |
| System Power | 25 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 23.9 |
| UGR C90/C270 | 23.4 |
| CIE Flux Codes | 47 77 94 96 100 |
| Ra/CRI | >80 |