


# ML-A 045.1040.11 AOV

Monoline 045 | Surface-Mounted & Pendant (1xLED 26W 840/4000K 2850lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

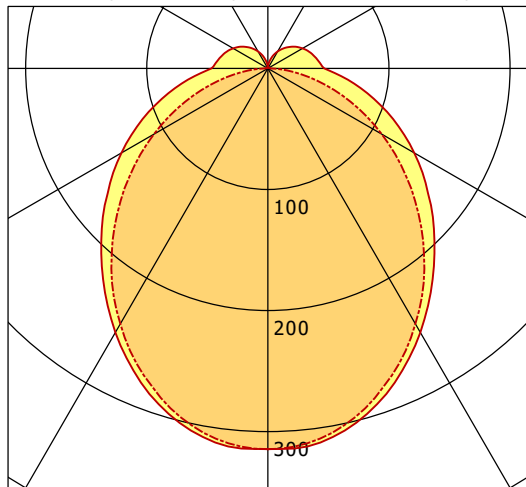

	C0	C90	C180	C270
0°	314	314	314	314
30°	252	244	252	244
60°	140	109	140	109
90°	47	2	47	2
120°	33	1	33	1
150°	16	1	16	1
180°	0	0	0	0
cd / 1000 lm				

LDC unsuitable for cone representation.  
The C0 angle is oversized.

<b>η</b>	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 88% / ↑ 12%
System Power	26 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.7
UGR C90/C270	23.3
CIE Flux Codes	46 74 92 88 100
Ra/CRI	> 80