



FLIR 100.1040.35

Flix 100 Round (FLIRZ 100.05, 1xLED 15W 840/4000K 1400lm 35 °)

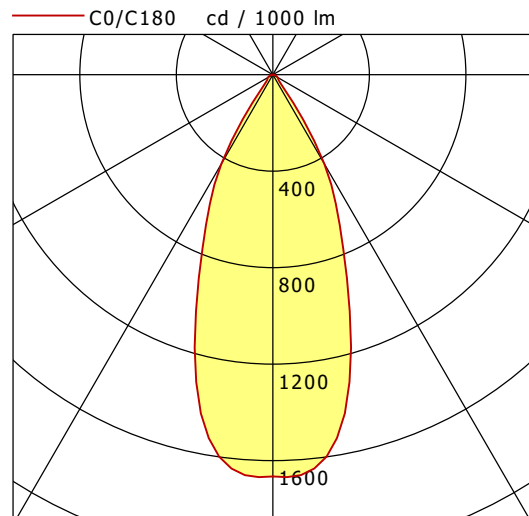

	C0	C90	C180	C270
0°	1666	1666	1666	1666
15°	1246	1246	1246	1246
30°	426	426	426	426
45°	36	36	36	36
60°	23	23	23	23
75°	12	12	12	12
90°	1	1	1	1
cd / 1000 lm				

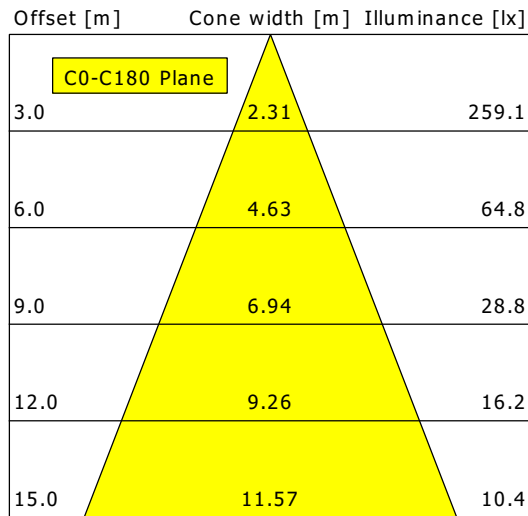

η	LED
Efficiency	93 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.5
UGR C90/C270	24.5
CIE Flux Codes	91 96 99 100 100
Ra/CRI	>80