
## Art. no. 836013

## Spherical light Doradus 300 mm, 1x max. 23 W E27, Beige





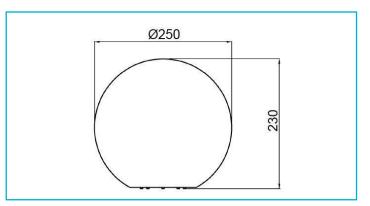

Mediterranean flair in your own garden - Want to enjoy the magic of Tuscany at home? Not a problem thanks to the spherical light in a terracotta look. This light conjures a pleasantly warm ambience in the twilight and always puts you in a holiday mood. The magic also comes into its own brilliantly indoors. Thanks to the E27 holder, the light can be fitted with your chosen bulbs. We recommend a dimmable LED lamp to benefit from the full potential this light has to offer.

## **Special features**

٠

•

- Timeless design
- Eye-catcher
- IP65
- Fully wired with IP44 plug
- Including ground spike

| Housing Material              | Polyresin                          |
|-------------------------------|------------------------------------|
| Housing Color                 | Beige                              |
| Housing Surface               | Terracotta look                    |
|                               |                                    |
| Protection Class              | Protection class II/protective     |
|                               | insulation                         |
| max. Power                    | 1x max. 23 W                       |
| Rated Input Voltage Frequency |                                    |
| Socket Description            | E27                                |
| Socket Quantity               | 1                                  |
| Connection Cable Primary      | Yes                                |
| Primary Connection            | Power plug IP44                    |
| Primary Cable Length          | 3 m                                |
| Dimmable                      | Yes                                |
| Control technology            | Dimmable via optional light source |
| Motion Detector               | No                                 |
| Execution                     | Without lamp                       |
| Light Exit Surfaces           | 1                                  |
| Light characteristics         | Direct                             |
| Light direction               | Top, Below, Side, Rear             |
| Height                        | 230 mm                             |
| Diameter                      | 250 mm                             |
| Product weight                | 1000 g                             |
|                               | 1000 g                             |
| Working Temperature           | -20 to 40 °C                       |
| Storage Temperature           | -10 to 60 °C                       |
| IP Protection Class Lamp      | IP 65                              |
| IF FIDLECTION Class Lamp      |                                    |