


FLIR 400.2030.01/DALI

Flix 400 Round (FLIRZ 400.05, 1xLED 21W 830/3000K 2170lm 75 °)

— C0/C180 cd / 1000 lm

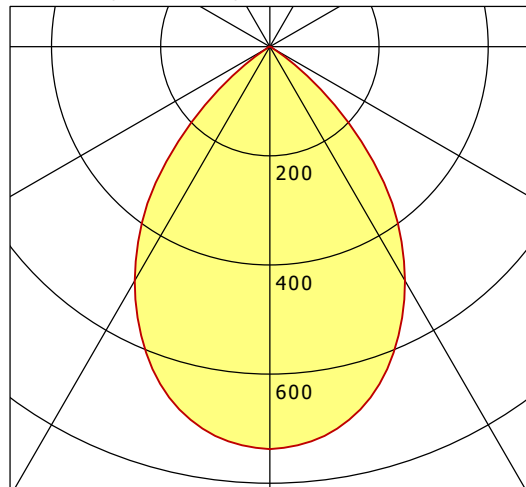

	C0	C90	C180	C270
0°	738	738	738	738
15°	677	677	677	677
30°	495	495	495	495
45°	221	221	221	221
60°	7	7	7	7
75°	4	4	4	4
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	4.65	177.8
6.0	9.29	44.5
9.0	13.94	19.8
12.0	18.58	11.1
15.0	23.23	7.1

η	LED
Efficiency	103 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.6
UGR C90/C270	19.6
CIE Flux Codes	81 99 100 100 100
Ra/CRI	>80