


# ML-A 070.0730.08 APB/DALI


Monoline 070 Surface-Mounted & Pendant (1xLED 9W 830/3000K 840lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

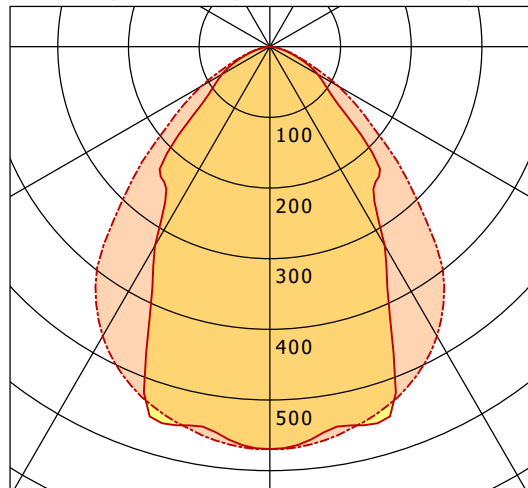

	C0	C90	C180	C270
0°	569	569	569	569
15°	554	545	554	545
30°	325	473	325	473
45°	195	284	195	284
60°	78	112	78	112
75°	23	27	23	27
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

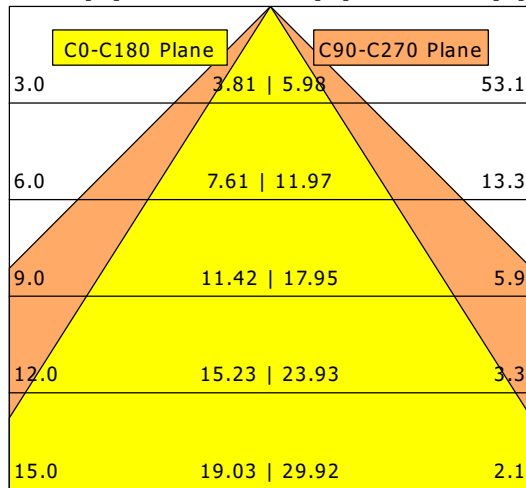

<b>η</b>	LED
Efficiency	93 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	9 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.1
UGR C90/C270	18.2
CIE Flux Codes	66 91 99 100 100
Ra/CRI	>80