


ML-A 070.1130.14 APB/DALI


Monoline 070 Surface-Mounted & Pendant (1xLED 55W 830/3000K 5010lm)

— C0/C180 cd / 1000 lm - - - C90/C270

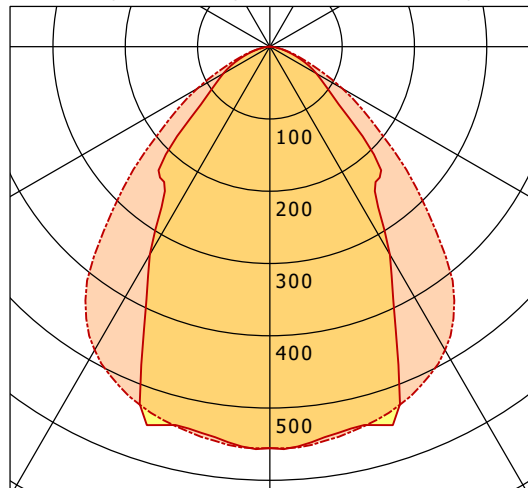

	C0	C90	C180	C270
0°	556	556	556	556
15°	541	539	541	539
30°	332	485	332	485
45°	193	297	193	297
60°	74	116	74	116
75°	24	27	24	27
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

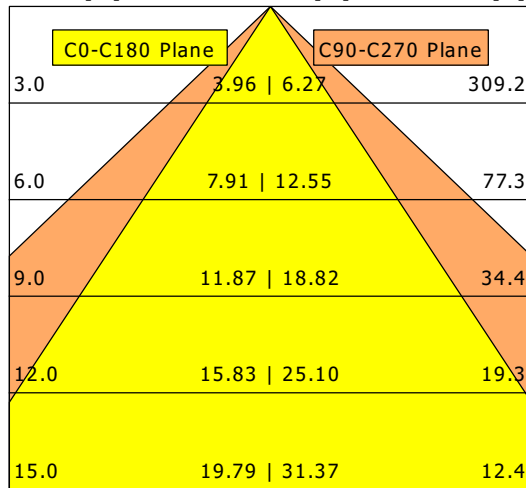

η	LED
Efficiency	91 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	55 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.5
UGR C90/C270	22.7
CIE Flux Codes	66 91 99 100 100
Ra/CRI	>80