

## Wall mounting appliance inlet - housing dimensions 260x160



| Product description       |                               |
|---------------------------|-------------------------------|
| BALS-Prd.-Nr              | 24200                         |
| EAN                       | 4024941242004                 |
| Product category          | Wall mounting appliance inlet |
| Current                   | 125A                          |
| Number of poles           | 4p                            |
| Arrangement of phases     | 3P+PE                         |
| Position of earth contact | 6 h                           |
| Voltage                   | 380 - 415V~                   |


| Product description    |                                                                                                                                        |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Frequency              | 50/60Hz                                                                                                                                |
| Protection degree      | IP67                                                                                                                                   |
| Colour code            | red RAL 3000                                                                                                                           |
| Colour of appliance    | Collar red RAL 3000, Bayonet ring grey RAL 7035, Housing screws grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035 |
| Connection design      | screw terminal as box terminal                                                                                                         |
| Maximum conductor size | 50.0 qmm                                                                                                                               |
| Cable entry            | 1xM50 from above                                                                                                                       |
| Height                 | 366mm                                                                                                                                  |
| Width                  | 160mm                                                                                                                                  |
| Depth                  | 163mm                                                                                                                                  |
| Dimension of enclosure | 260x160 mm (HxW)                                                                                                                       |
| Material of enclosure  | Polycarbonate                                                                                                                          |
| Contacts               | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated                               |

| Additional technical properties |                                    |
|---------------------------------|------------------------------------|
|                                 | The cable entry is one at top open |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 2.14 kg / Piece |
| Packaging      | Carton          |

**Logistics data**

|                |               |
|----------------|---------------|
| Content amount | 1 ST          |
| EAN            | 4024941242004 |
| Length         | 440 mm        |
| Width          | 225 mm        |
| Height         | 165 mm        |
| Weight         | 2.368 kg      |
| Volume         | 13,545 ccm    |

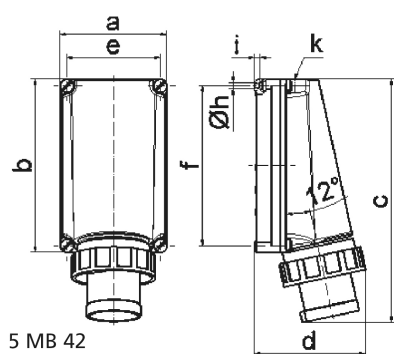

| Ampere<br>Polzahl | 125<br>3 | 125<br>4 | 125<br>5 |  |  |  |
|-------------------|----------|----------|----------|--|--|--|
| a                 | 160,0    | 160,0    | 160,0    |  |  |  |
| b                 | 260,0    | 260,0    | 260,0    |  |  |  |
| c                 | 364,0    | 364,0    | 364,0    |  |  |  |
| d                 | 165,0    | 165,0    | 165,0    |  |  |  |
| e                 | 140,0    | 140,0    | 140,0    |  |  |  |
| f                 | 240,0    | 240,0    | 240,0    |  |  |  |
| h ø               | 8,3      | 8,3      | 8,3      |  |  |  |
| i                 | 10,0     | 10,0     | 10,0     |  |  |  |
| k                 | M50      | M50      | M50      |  |  |  |
| Leiter mm² min    | 16       | 16       | 16       |  |  |  |
| Leiter mm² max    | 50       | 50       | 50       |  |  |  |
|                   |          |          |          |  |  |  |
|                   |          |          |          |  |  |  |