


# ML-A 060.1040.14 U19DB/DALI


Monoline 060 | Surface-Mounted | Glare Control (1xLED 19W 840/4000K 2370lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

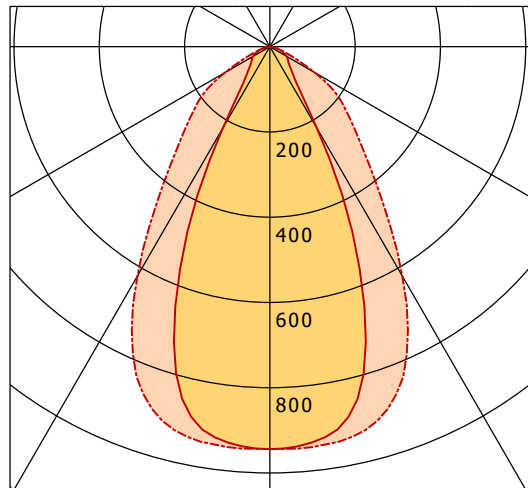

	C0	C90	C180	C270
0°	944	944	944	944
15°	827	921	827	921
30°	220	621	220	621
45°	67	287	67	287
60°	45	122	45	122
75°	21	17	21	17
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

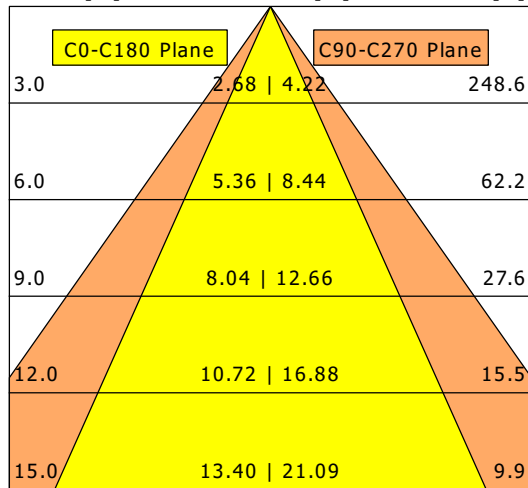

<b>η</b>	LED
Efficiency	125 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	19 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.5
UGR C90/C270	18.8
CIE Flux Codes	80 94 99 100 100
Ra/CRI	>80