



# BIXXL 206.40.60.2/DALI-ST

Bixxl 200 (1xLED 59W 840/4000K 6110lm 60 °)

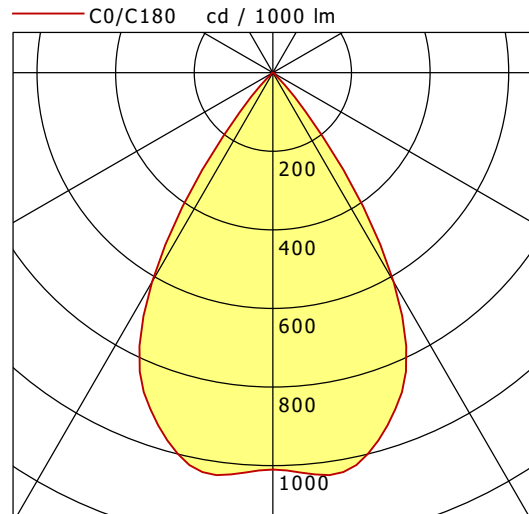

	C0	C90	C180	C270
0°	1010	1010	1010	1010
15°	987	987	987	987
30°	614	614	614	614
45°	31	31	31	31
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

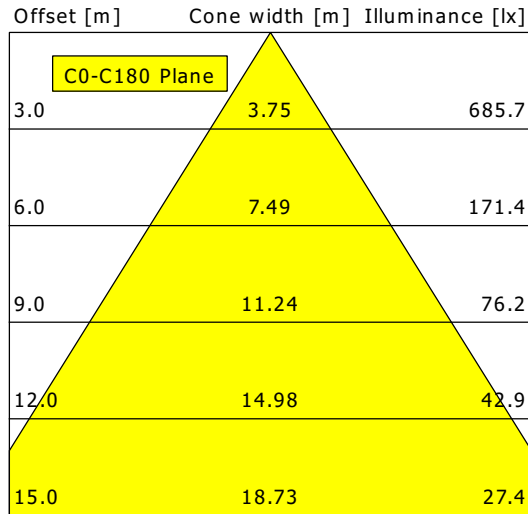

<b>η</b>	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	59 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.0
UGR C90/C270	23.0
CIE Flux Codes	97 99 100 100 100
Ra/CRI	> 80