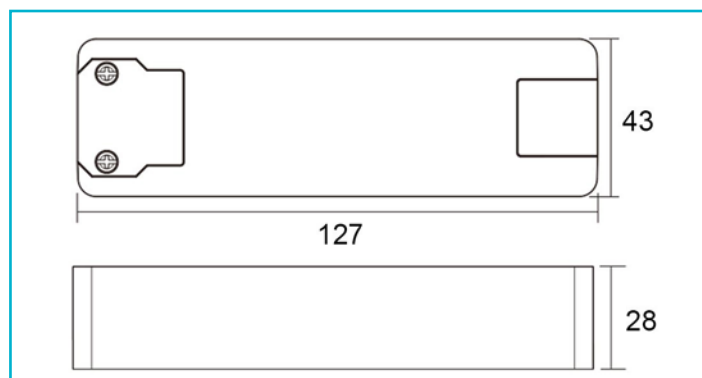


**Special features**

- Compact design
- Flicker-free
- Short-circuit-proof, overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Power	20.0-40 W
Output Voltage	19-38 V/DC
Output Current	1050 mA
Power Factor	0.97
Connection Type	Clamp

Number of Circuit Breaker B10A max.	8
Number of Circuit Breaker B16A max.	14
Number of Circuit Breaker C10A max.	18
Number of Circuit Breaker C16A max.	29
Inrush Current max.	20 A / 300 µs
Capacitive Load	355.52 nF
Reference Point Tc	90 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20

Life Time	30000 h
------------------	---------

Length	127 mm
Width	43 mm
Height	28 mm
Product weight	117 g

