




- Special features**
- Flicker-free
 - Short-circuit-proof, overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Power	100 W
Output Voltage	24 V/DC
Output Current	0-4200 mA
Power Factor	0.98
Connection Type	Clamp
Number of Circuit Breaker B10A max.	3
Number of Circuit Breaker B16A max.	5
Number of Circuit Breaker C10A max.	7
Number of Circuit Breaker C16A max.	11
Inrush Current max.	50 A / 300 µs
Capacitive Load	724.2 nF
Reference Point Tc	85 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 50 °C
IP Protection Class	IP 20
Life Time	30000 h
Length	184 mm
Width	61 mm
Height	32 mm
Product weight	326 g

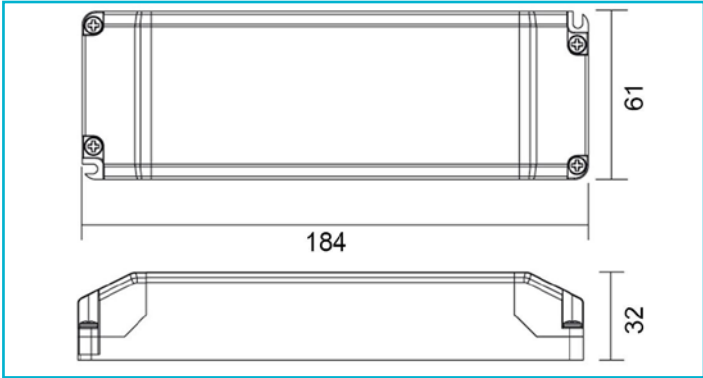