



BIXXL 204.30.40.2/DALI-ST

Bixxl 200 (1xLED 41W 830/3000K 4140lm 40 °)

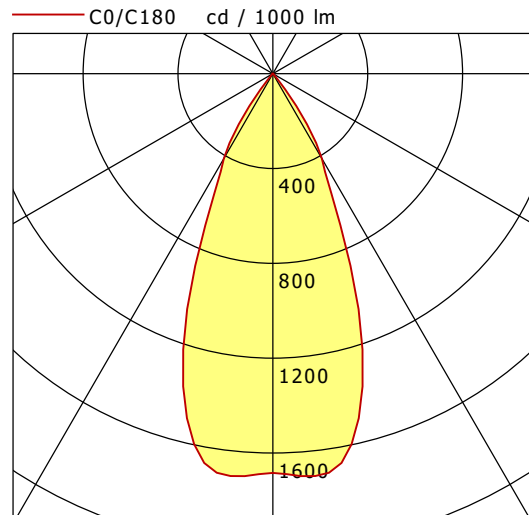

	C0	C90	C180	C270
0°	1684	1684	1684	1684
15°	1438	1438	1438	1438
30°	413	413	413	413
45°	7	7	7	7
60°	3	3	3	3
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

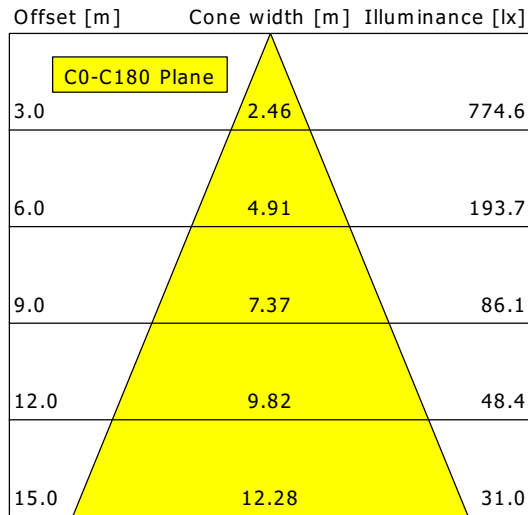

η	LED
Efficiency	101 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	41 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.6
UGR C90/C270	18.6
CIE Flux Codes	98 99 100 100 100
Ra/CRI	>80