## lightnet

#### Matric-RX

Pendant light-line - Direct/indirect light distribution

Article code: LRXGEE-840M-L1182-A



Illustrations may only be similar and serve as an orientation.


Matric-RX. LED. Pendant light-line. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Wall-Washer for asymmetrical light distribution. Switchable. LxWxH (rectangular). L=1182mm. W=40mm. H=75mm. Single-cord suspension (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling rose:

Matching luminaire`s surface colour. Medium-power current. 4000lm. 37W. 3,5kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

# lightnet

### Matric-RX

Pendant light-line - Direct/indirect light distribution

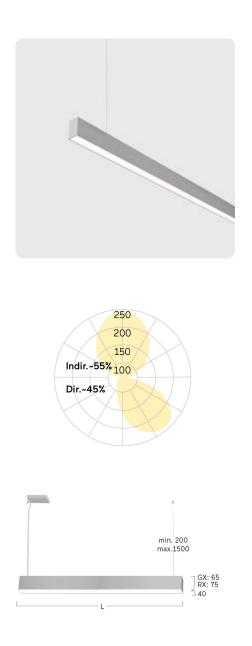

#### Article code: LRXGEE-840M-L1182-A

Custome	r / Project:		
Note:			

Productname Matric-RX Lamp LED Installation Type Pendant light-line Surface finish Silver Anodised Light characteristics Direct/indirect light distribution 4000K Colour temperature Colour Rendering Index (CRI) CRI>80 Optical system Wall-Washer Control Switchable Length L/Diameter D (mm) L=1182mm Width W (mm) W=40mm Height H (mm) H=75mm Current/Power Medium-Power 4000lm Luminous Flux Power consumption 37W Suspension Single susp. (Set) Ceiling rose colour Ceiling rose: Matching luminaire`s surface colour Pendant length (mm) Pendant length max 1500mm **IP20** Degree of protection Certification Prüfzeichen: ENEC Cable Colour Power supply: transparent L85B10 (tq 25°C) = 50.000h LED lifetime 8 40 / 3 3 9 Photometric code Photobiological class RG0 (EN62471) Indoor/Outdoor Indoor: ta [ambient] max. 25°C Weight (kg) 3,5kg

IP20 ( 720- 50-60 IK RG0 S3 LOW DOWER SOOD POWER SOOD OF CE LA CE