


Art. no. 707210

Three-phase light Linear Pro, Fold, 50 W, DALI, 3000 K, Black

 DEKOLIGHT

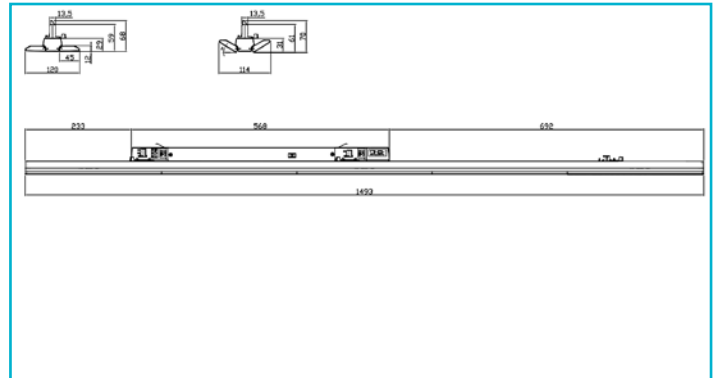

Housing Material	Aluminium	Storage Temperature	-40 to 85 °C
Housing Color	Black	IP Protection Class	IP 20
Material of Lens	PMMA	IK Protection Class	IK03
Protection Class	Protection class I/protective grounding	Life Time L70 / B50	60000 h
Rated Input	50 W	Life Time L80 / B50	60000 h
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Switching Cycles	100000
Power Supply Unit incl.	Yes	Power Consumption	50 kWh/1000h
Connection Type	Adapter	Energy Efficiency Class Lightsources	This product contains light sources of energy efficiency classes B and C.
Dimmable	Yes		
Control technology	DALI 2 / DT6		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Lightcolor	Warm white (WW)		
Color Temperature	3000 K		
Colour Consistency	3 SDCM		
Colour Rendering Index (Ra)	90		
Rated Luminous Flux	7000 lm		
Luminous Efficiency	140 lm/W		
Rated Angle of Reflection	30 Degree		
Rated Angle of Reflection 2	90 Degree		
Light Distribution	Symmetric		
Light Exit Surfaces	3		
Light characteristics	Direct		
Light direction	Below		
Length	1493 mm		
Width	120 mm		
Height	68 mm		
Product weight	2150 g		
Working Temperature	-25 to 40 °C		