



VTFS-R 101.840

Vale-Tu Flat Small | Recessed (1xLED 14W 840/4000K 1120lm)

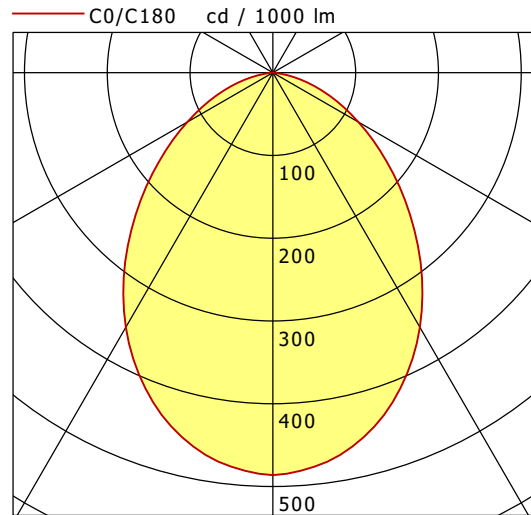

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 486 | 486 | 486 | 486 |
| 15° | 449 | 449 | 449 | 449 |
| 30° | 355 | 355 | 355 | 355 |
| 45° | 230 | 230 | 230 | 230 |
| 60° | 119 | 119 | 119 | 119 |
| 75° | 39 | 39 | 39 | 39 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

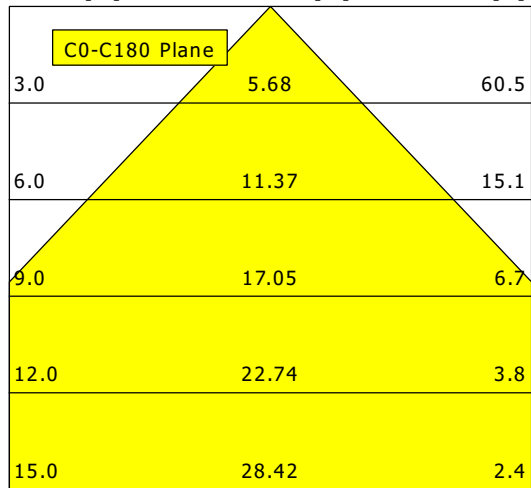

| | |
|--------------------|------------------|
| η | LED |
| Efficiency | 80 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 14 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 26.2 |
| UGR C90/C270 | 26.2 |
| CIE Flux Codes | 58 86 98 100 100 |
| Ra/CRI | >80 |