


OPT-R 104.0600.830/DALI


Optico | Recessed (1xLED 42W 830/3000K 4340lm)

— C0/C180 cd / 1000 lm - - - C90/C270

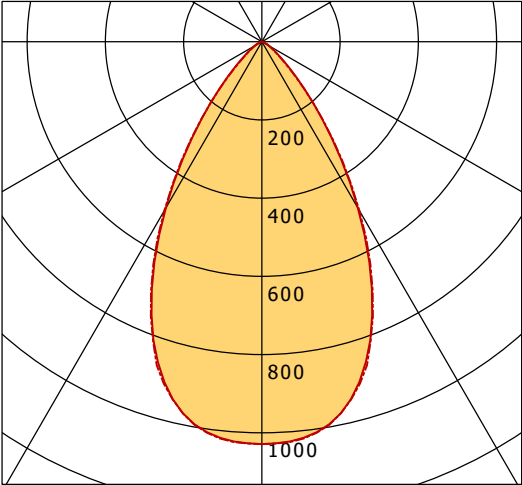

	C0	C90	C180	C270
0°	1029	1029	1029	1029
15°	924	927	924	927
30°	491	498	491	498
45°	115	109	115	109
60°	22	21	22	21
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

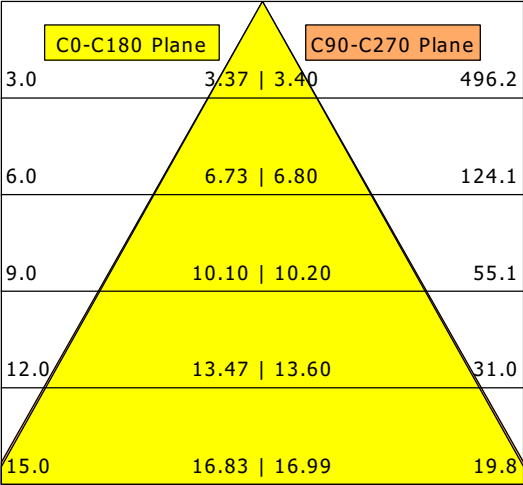

η		LED
Efficiency		103 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		42 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		12.4
UGR C90/C270		12.3
CIE Flux Codes	88 99 100 100 100	
Ra/CRI		> 80