

VIDEOMODULATOR


Videomodulator

- ▶ Pegelsteller am Ausgang um Störsignale zu vermeiden.
- ▶ Beiliegender Drehregler für Pegelstelle.
- ▶ DC-Durchlass IN-OUT.
- ▶ Sehr kleine Bauform: 145 x 45 x 35 mm.
- ▶ Umgebungstemperatur: -20...60°C.

Art.Nr.	Ref.Nr.	Beschreibung
VM5858	5858	Videomodulator S02-K69, 85dB μ V



▶ VM5858 (5858)

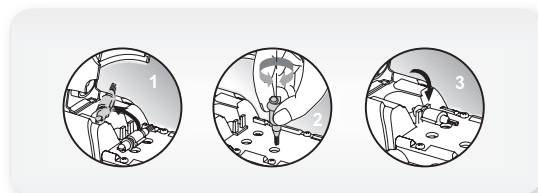

Art.Nr.	VM5858	
Ref.Nr.	5858	
Standard	PAL B/G, B Australia, PAL I, K CCIR, M-N, SECAM L, D OIRT, D-K PAL	
Kanäle VHF	BS (S01-S10), BIII (K5-K12), BS (S11-S29)	
Kanäle UHF	21-69	
Ausgangspegel	dB μ V	85-90
Pegelsteller	dB	0...15
Tonträger	MHz	5,5MHz (Pal B/G)
Modulationstiefe	%	85
Video - Eingangspegel	W	1Vpp s/75
Frequenzbereich	MHz	5-2150
Rückflussdämpfung	dB	10
Spannungsversorgung	196-264V~ 50-60Hz	
Stromverbrauch (I max.)	A	0,026
DC-Durchlass	mA	300 max.

