




LED power supply unit 24 V DC, DALI-2 dimmable
Article no. 1725 1000

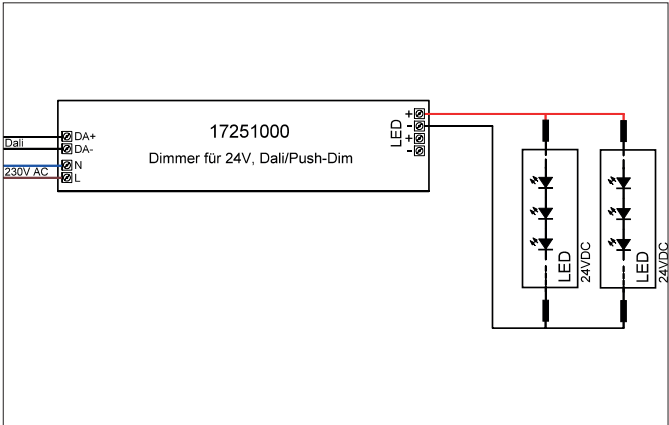

Tender	
LED power supply unit 24 V DC, DALI-2 dimmable, white, Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC, Power: 80 W, Dimmable: Yes, Type of dimming: DALI-2.	

- Product Benefits**
- Plastic housing incl. strain relief
 - protection class II
 - dimmable via DALI-2
 - Measuring point Tc (max) 85°C

Article data	
Article no.	1725 1000
GTIN	4251433955245
Short description	LED power supply unit 24 V DC, DALI-2 dimmable
Material	Plastic
Colour	white
Shape	Rectangular
Length	290 mm
Width	45 mm
Height	31 mm
Weight	0.298 kg
stamp	ENEC, EL
Conformance	CE, UKCA

**LED power supply unit 24 V DC, DALI-2 dimmable**

Article no. 17251000

Operating technology of driver	
AC nominal voltage min	176 V
AC nominal voltage max	264 V
Frequency min	47 Hz
Frequency max	63 Hz
DC nominal voltage min	176 V
DC nominal voltage max	280 V
Protection class	II
Degree of protection	IP20
Power	1 W
Power max.	80 W
Starting current	50 A, 300 µs
Suitable for emergency lighting	No
measure point (tc)	85 °C
Power factor	0.95
max. no. lights on B10 A	8
max. no. lights on B16 A	12
max. no. lights on C16 A	15
max. no. lights on C10 A	10
Output voltage max	24.00 V
Output voltage min.	24.00 V
Control	DALI-2 , PUSH-Dimm
Connection type-primary	Screw-in connection
Connection type-secondary	Screwed terminal
Number of poles	5
Flicker-free	Yes
Average nominal lifespan	44000 h
Packing data	
Gross weight	0.332 kg
Length of packaging	330 mm
Packaging width	50 mm
Packaging height	37 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.