


# PON-P 103.1283.830/SENSO


Pondero (1xLED 24W 830/3000K 2910lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

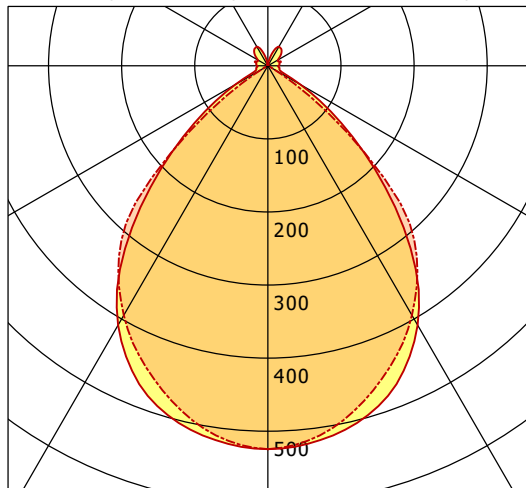

	C0	C90	C180	C270
0°	525	525	525	525
15°	501	482	501	482
30°	410	394	410	394
45°	217	241	217	241
60°	52	9	52	9
75°	16	2	16	2
90°	14	0	14	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

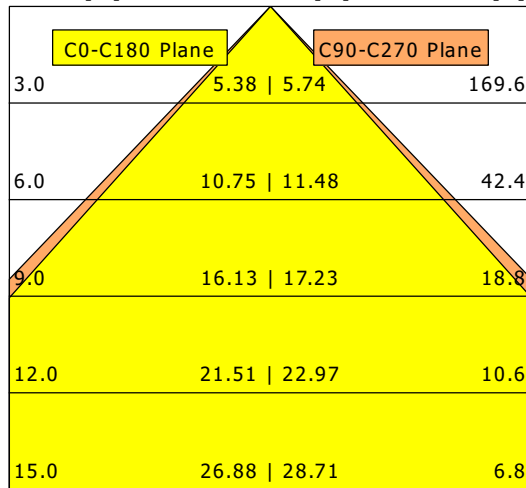

<b>η</b>	LED
Efficiency	121 lm/W
Direct/Indirect	↓ 91% / ↑ 9%
System Power	24 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	14.5
UGR C90/C270	15.1
CIE Flux Codes	71 96 99 91 100
Ra/CRI	>80