


Art. no. 862241

Power supply unit (CV, DC) dimmable BASIC, DIM, CV,
12 V 34-100 W

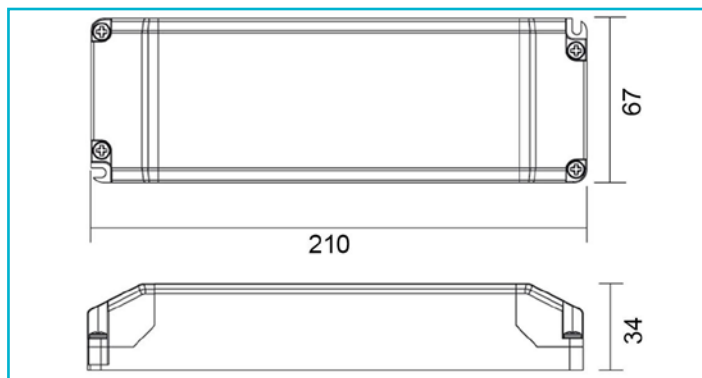

Special features

- Can be dimmed using leading-edge/trailing-edge phase dimmers
- Compact design
- Short-circuit-proof, overload protection, overheating protection
- Flicker-free

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Power	34.0-100 W
Output Voltage	12 V/DC
Output Current	2700-8300 mA
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Number of Channels	1
Power Factor	0.95
Connection Type	Clamp

Number of Circuit Breaker B10A max.	7
Number of Circuit Breaker B16A max.	15
Number of Circuit Breaker C10A max.	7
Number of Circuit Breaker C16A max.	15
Inrush Current max.	45 A / 100 μ s
Capacitive Load	146.34 nF
Reference Point Tc	85 °C
Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 45 °C
IP Protection Class	IP 20

Length	210 mm
Width	67 mm
Height	34 mm
Product weight	404 g

